



| | | |
|-------|----------|-------|
| Code: | Project: | Type: |
| | Notes: | |

KAO KIT E LED WALL/CEILING

Design Bruno Houssin

| #CAT | model | config. | finish | certification | out put | voltage | CCT | driver | Quantity |
|--------------|------------|----------|--------|---------------|----------|-----------|-----|--------|----------|
| USC-M | 113 | 0 | ___ | 8 | H | 00 | ___ | ___ | |

| | |
|---------------|---|
| model | 113 = KAO Wall/Ceiling |
| configuration | 0 = E |
| finish | 1 = Black 2 = White |
| certification | 8 = UL |
| output | H = High output (4 x 40W LED) |
| voltage | 00 = UNV (120-277V) |
| CCT | LA = 3000K LB = 3500K |
| driver | TV = Dim 0-10V (on/off included) |

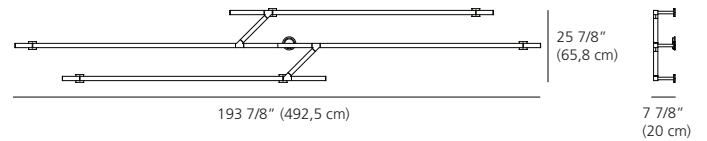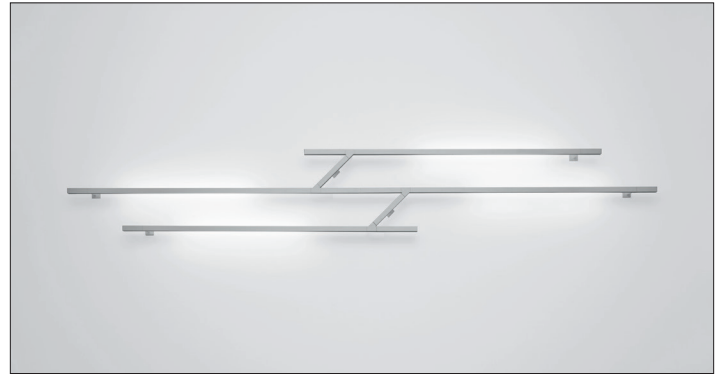

LAMPING:

Power input : 4 x 40W LED (160W total)

Lumen output : 6732lm

Efficacy : 42lm/W*

LM79 : Not available yet

*Informations calculated for 3500K

FEATURES:

Construction: Extruded aluminum body. 1 9/16" x 1 9/16" (40 x 40 mm) square section modules.

Diffuser: Dust protection cover in polycarbonate.

Notes: Electrical connections via quick connectors. Each structure is composed of pre-assembled and pre-wired sub units, supplied with a drilling template for placing the ceiling fixing points.

Weight: Not available yet

Certification: eULus - suitable for dry locations

Classification: IP20

PHOTOMETRIC DATAS: LED 1 x 40W

Photometric curve (cd):

