





## “O” Suspension


design  
Elemental



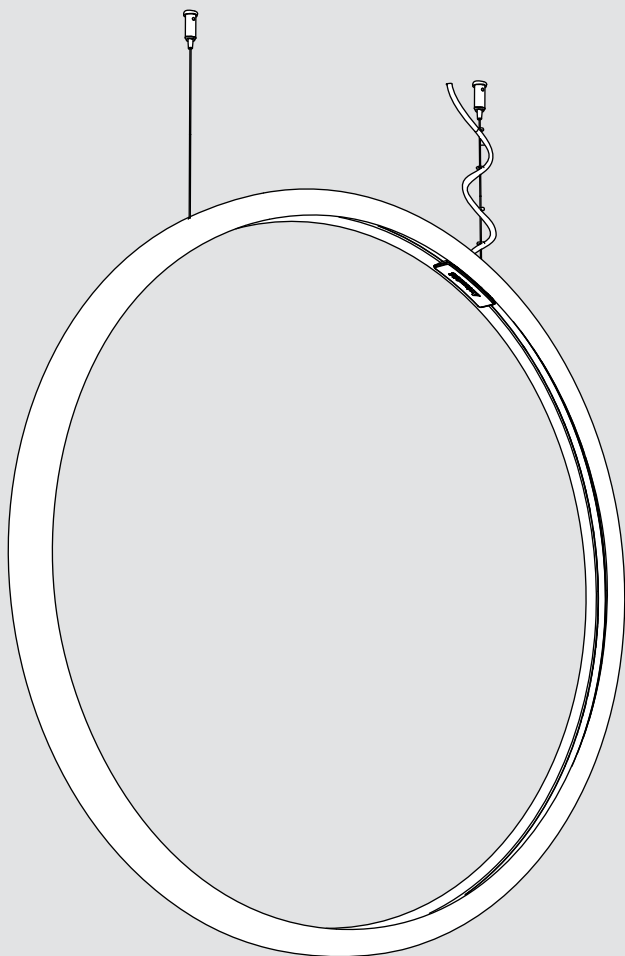


i

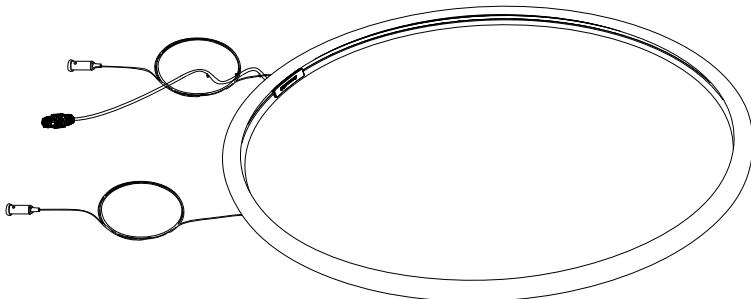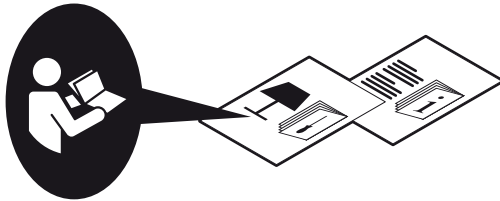

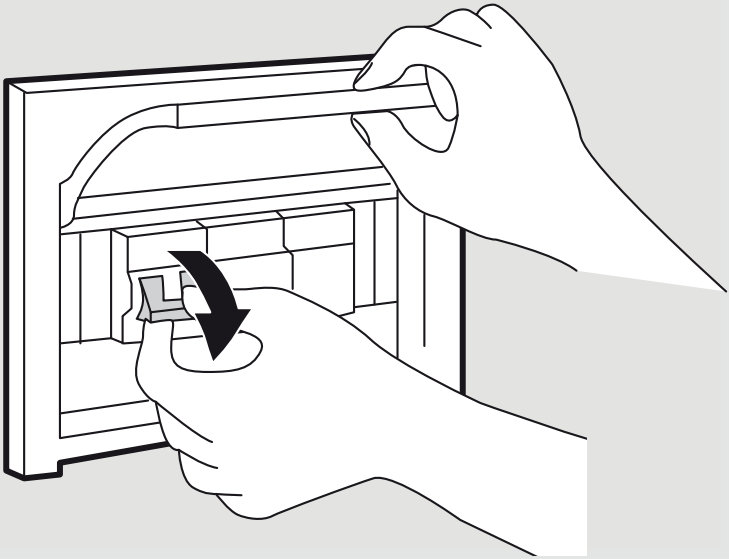


**i**

U out 24 V   
Max Power 60 W  
Max Current 2,5 A

Use only with class 2 power unit  
Utiliser exclusivement avec class 2 alimentation  
Utilícese únicamente con unidad de alimentación de clase 2



**MAX 4 m**

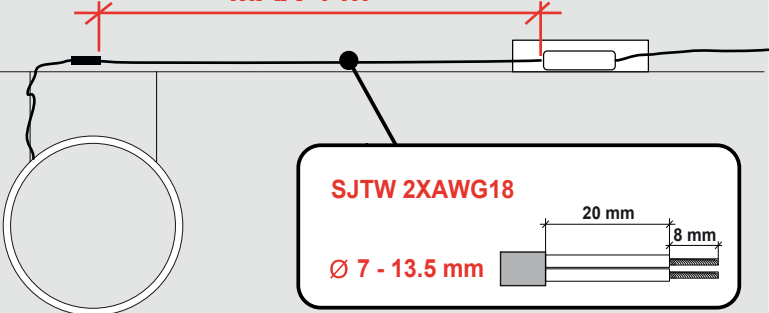


**SJTW 2XAWG18**


**Ø 7 - 13.5 mm**

20 mm


8 mm








1

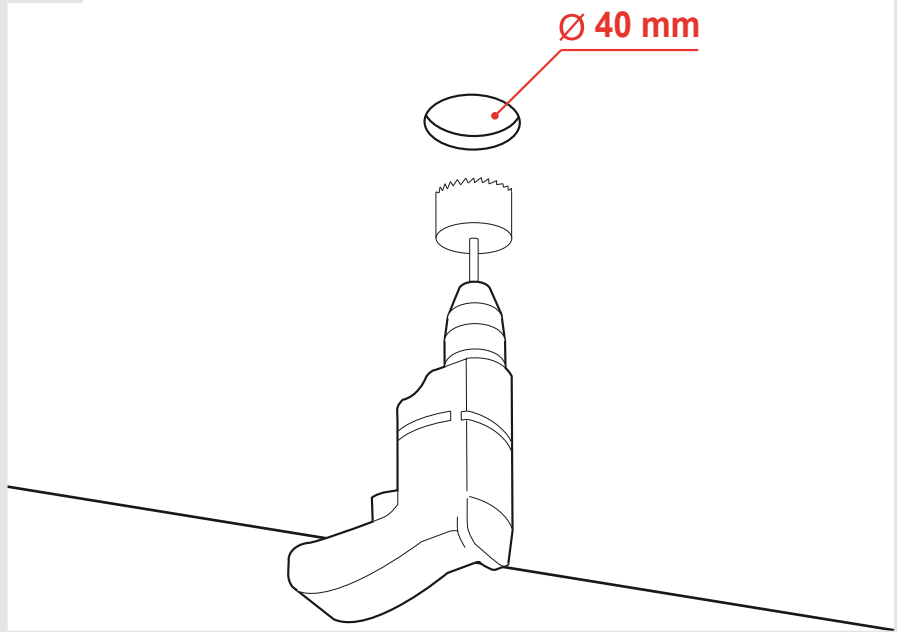


2

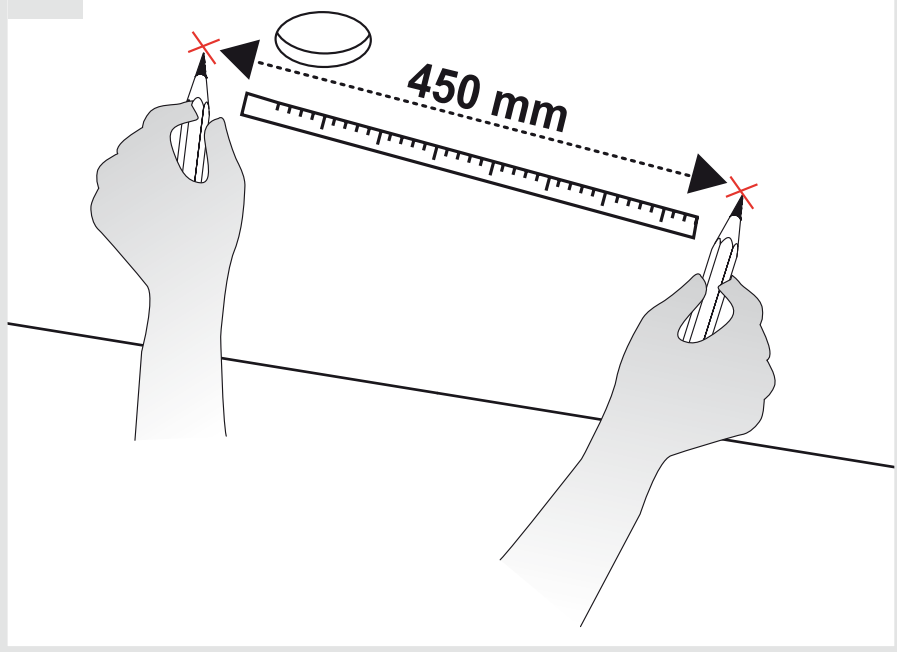


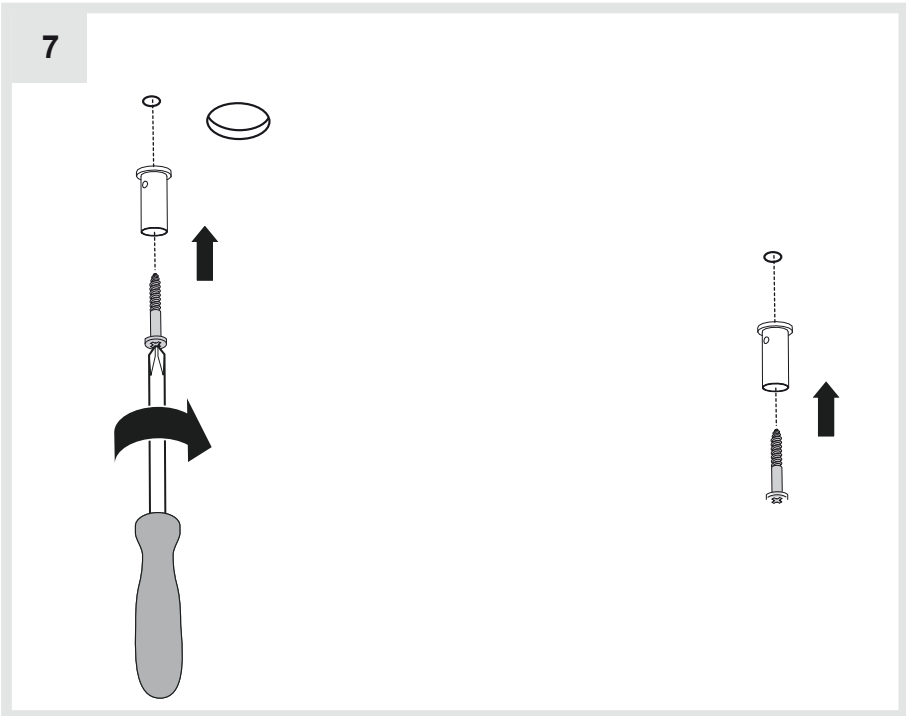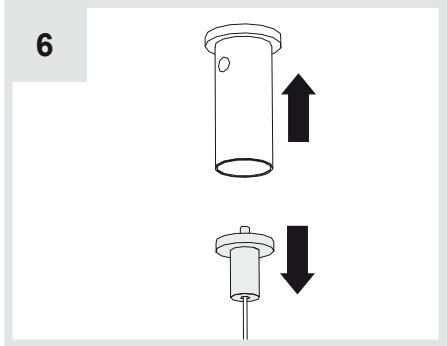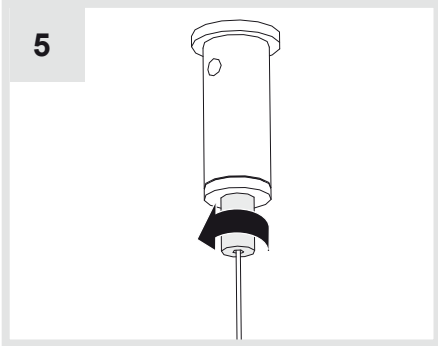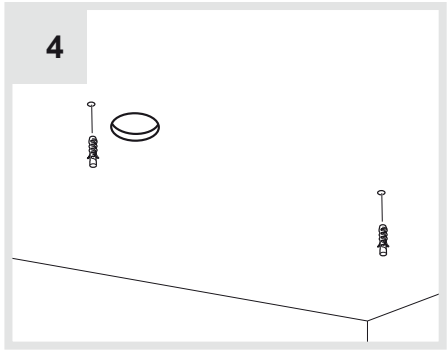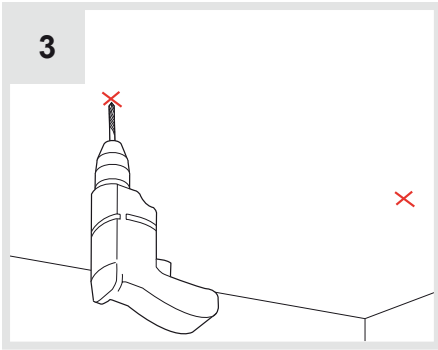



8




9







10



11

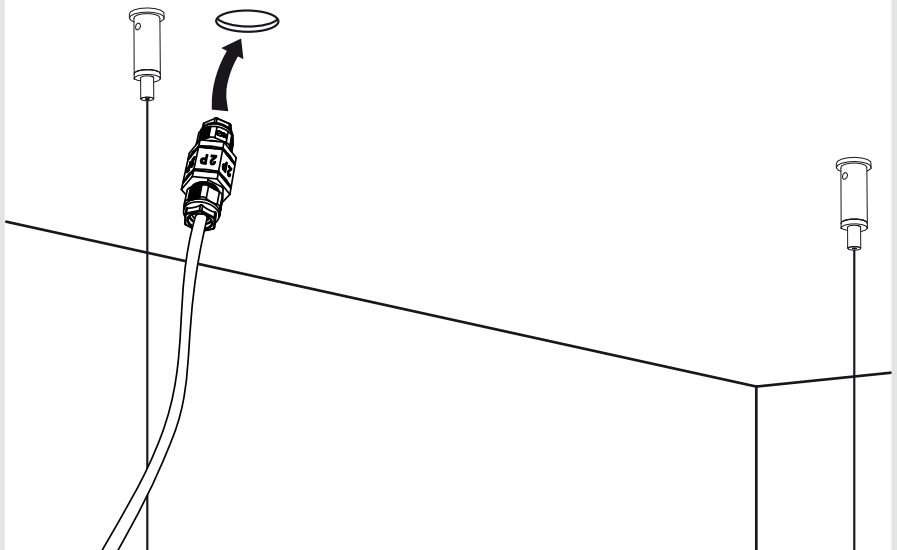

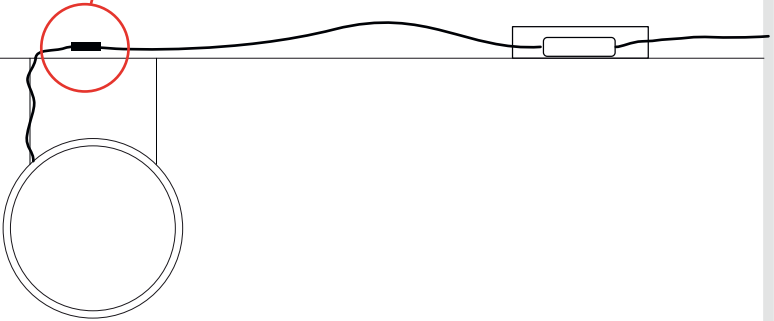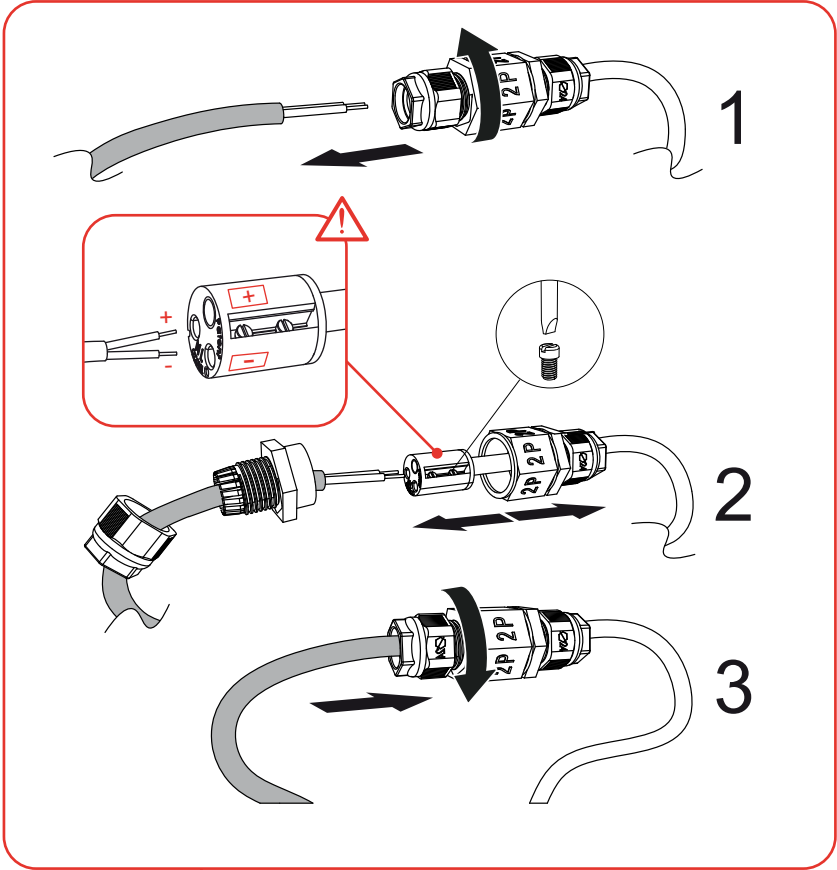

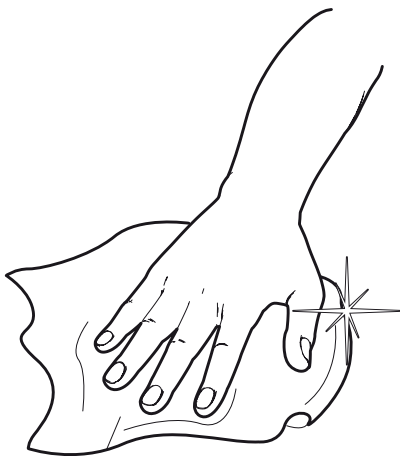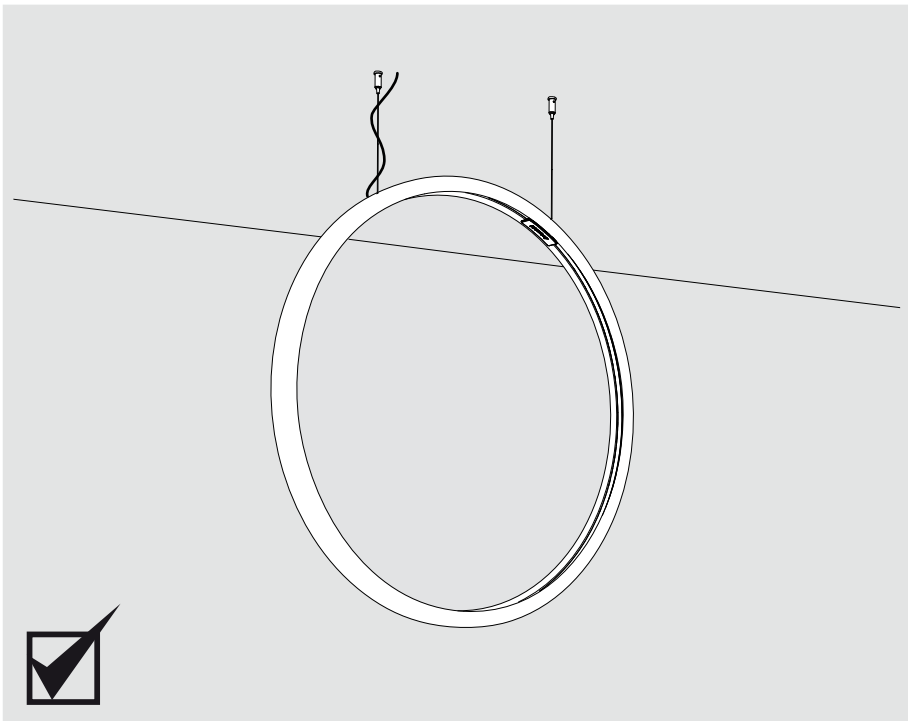










**Artemide®**



**Artemide**

via Bergamo, 18  
20010 Pregnana M.se (MI)  
ITALIA

tel. +39 02 935 181  
fax +39 02 935 90 254  
fax +39 02 935 90 496

[www.artemide.com](http://www.artemide.com)

VAT IT00846890150

cod. Y513001009