

## Luminaire

Code HoySpot\_SMD\_930\_UL-WF  
 Name Hoy spot SMD 930 UL - WF

## Measurement

Code RDN210207  
 Name Hoy spot SMD 930 UL - WF


Luminaire Flux	1803.56 lm	Luminaire Power	20.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Sources Flux	1803.56 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	188 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area			0.004301 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.001040 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		31-07-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1803.56 lm

LED Flux=2122lm LED Power=18W Eff=85% EfcLed=121lm/W EfcLum=90lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 92 99 100 100 100  
 F UTE 1.00 A

D DIN 5040 A60  
 B NBN BZ 1

Diam=90mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

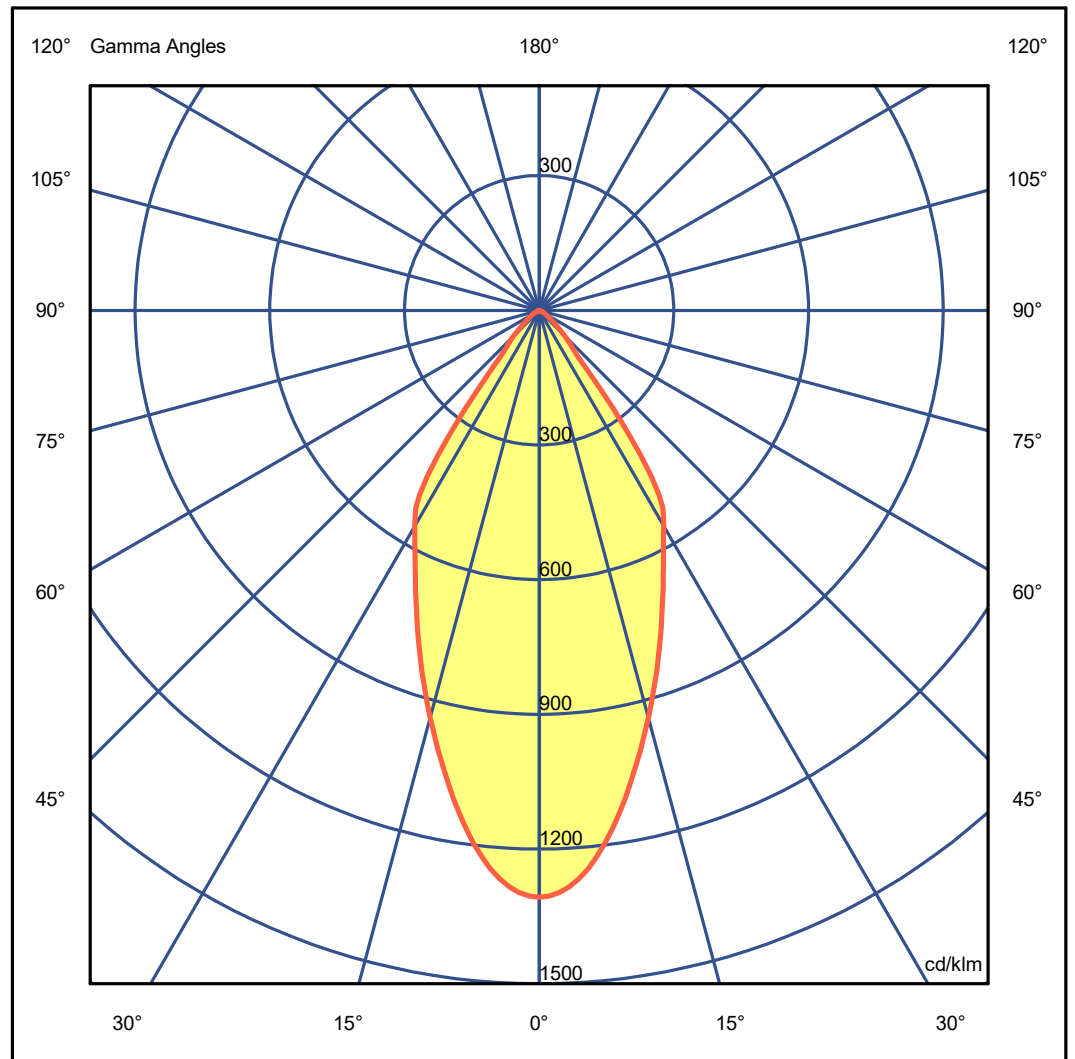

**Luminaire**

Code HoySpot\_SMD\_930\_UL-WF  
 Name Hoy spot SMD 930 UL - WF

**Measurem.**


Code RDN210207  
 Name Hoy spot SMD 930 UL - WF

Luminaire Flux	1803.56 lm	Luminaire Power	20.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Sources Flux	1803.56 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.93	1.40	1.86	2.33	OC	0.47	0.93	1.40	1.86	2.33
OB	0.47	0.93	1.40	1.86	2.33	OD	0.47	0.93	1.40	1.86	2.33

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2357.28	2250.89	1693.45	1178.28	705.47	146.38	43.03	11.91	2.50	0.15
OB	2357.28	2250.89	1693.45	1178.28	705.47	146.38	43.03	11.91	2.50	0.15
OC	2357.28	2250.89	1693.45	1178.28	705.47	146.38	43.03	11.91	2.50	0.15
OD	2357.28	2250.89	1693.45	1178.28	705.47	146.38	43.03	11.91	2.50	0.15

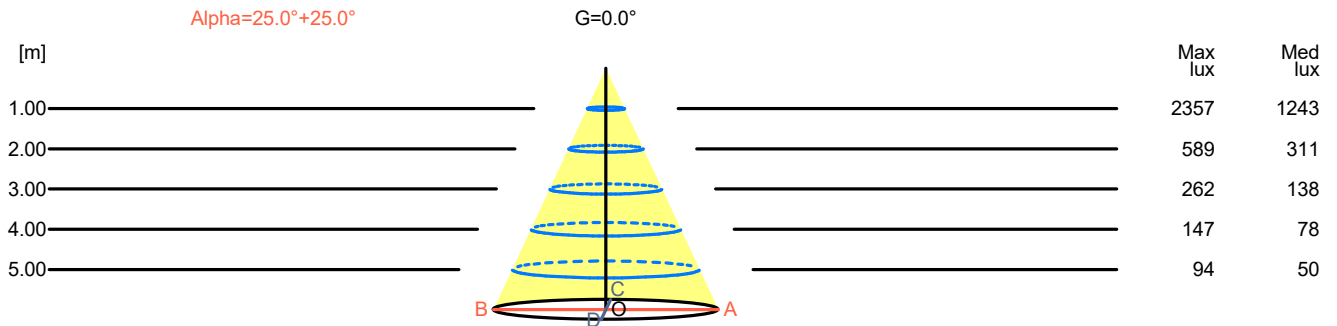

H[m]	D[m]	Max lux	Med lux	Alpha=25.0°+25.0°	G=0.0
1.00	0.93	2357	1243		
2.00	1.86	589	311		
3.00	2.80	262	138		
4.00	3.73	147	78		
5.00	4.66	94	50		