

Luminaire

Code HoySpot_SMD_940_UL-WF
 Name Hoy spot SMD 940 UL - WF

Measurement

Code RDN210207
 Name Hoy spot SMD 940 UL - WF


Luminaire Flux	2074.69 lm	Luminaire Power	20.00 W	Efficacy	103.73 lm/W	Efficiency	100.00%
Sources Flux	2074.69 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	188 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area			0.004301 m ²	Emitting area on Plane 180°			0.000000 m ²
Emitting area on Plane 0°			0.000000 m ²	Emitting area on Plane 270°			0.000000 m ²
Emitting area on Plane 90°			0.000000 m ²	Glare area at 76°			0.001040 m ²
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		31-07-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2074.69 lm

LED Flux=2441lm LED Power=18W Eff=85% EfcLed=139lm/W EfcLum=104lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 92 99 100 100 100
 F UTE 1.00 A

D DIN 5040 A60
 B NBN BZ 1

Diam=90mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

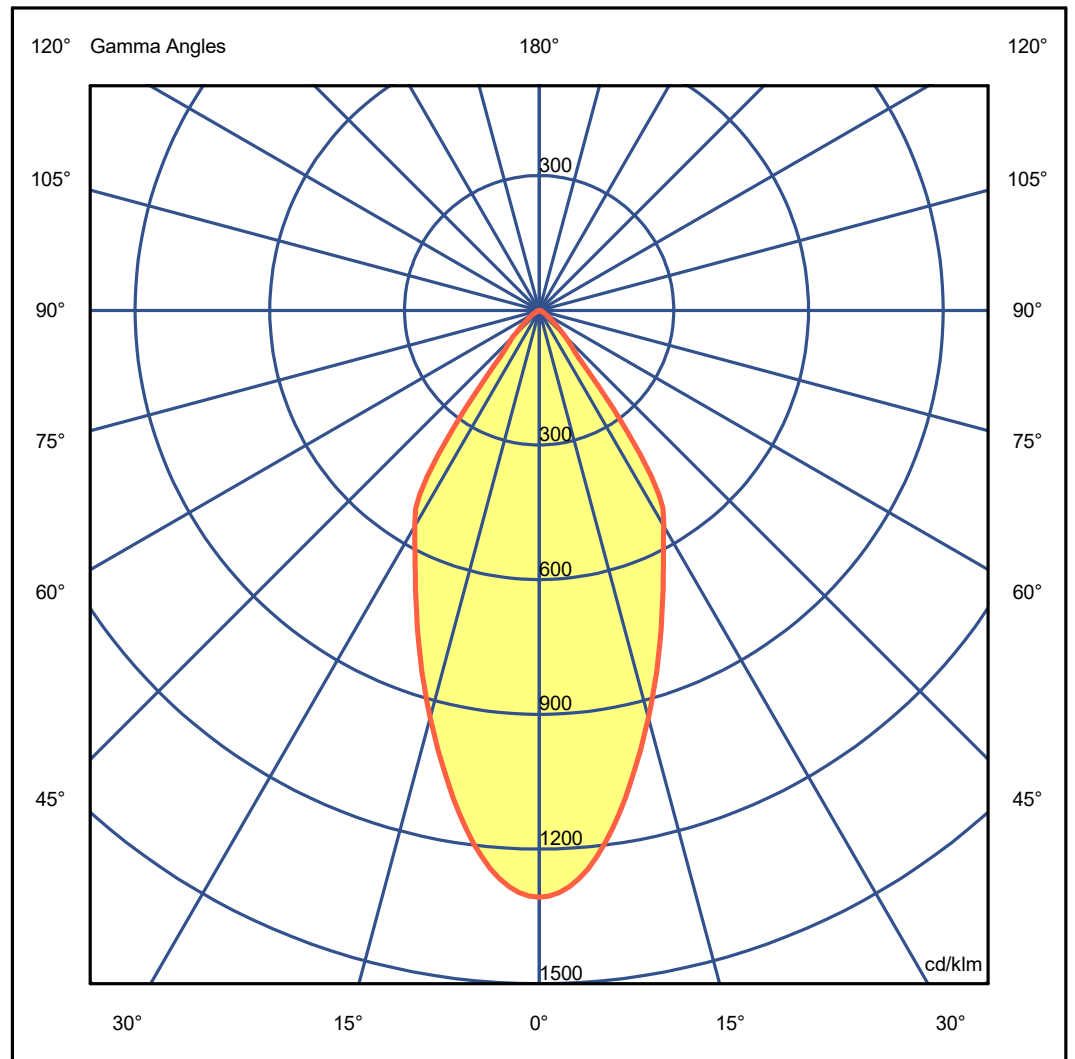

Luminaire

Code HoySpot_SMD_940_UL-WF
Name Hoy spot SMD 940 UL - WF

Measurem.


Code RDN210207
Name Hoy spot SMD 940 UL - WF

Luminaire Flux	2074.69 lm	Luminaire Power	20.00 W	Efficacy	103.73 lm/W	Efficiency	100.00%
Sources Flux	2074.69 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.93	1.40	1.86	2.33	OC	0.47	0.93	1.40	1.86	2.33
OB	0.47	0.93	1.40	1.86	2.33	OD	0.47	0.93	1.40	1.86	2.33

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2711.65	2589.27	1948.03	1355.41	811.53	168.38	49.50	13.70	2.87	0.17
OB	2711.65	2589.27	1948.03	1355.41	811.53	168.38	49.50	13.70	2.87	0.17
OC	2711.65	2589.27	1948.03	1355.41	811.53	168.38	49.50	13.70	2.87	0.17
OD	2711.65	2589.27	1948.03	1355.41	811.53	168.38	49.50	13.70	2.87	0.17

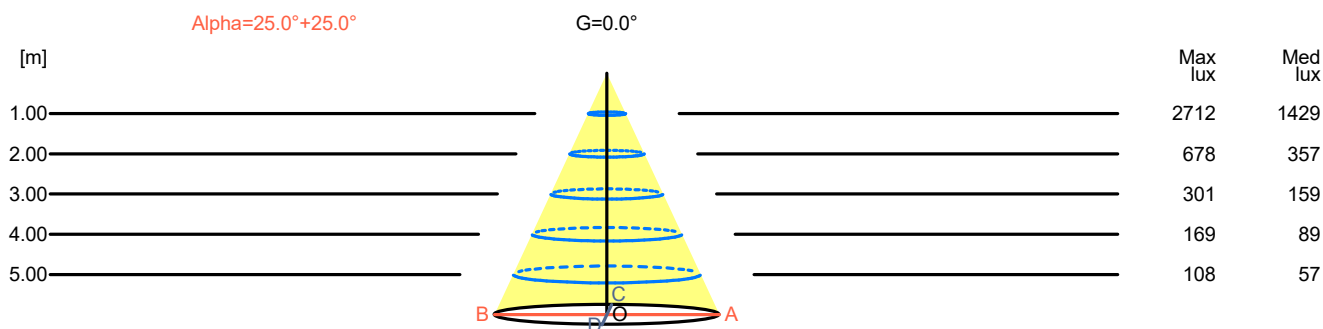

H[m]	D[m]	Max lux	Med lux	Alpha=25.0°+25.0°	G=0.0
1.00	0.93	2712	1429		
2.00	1.86	678	357		
3.00	2.80	301	159		
4.00	3.73	169	89		
5.00	4.66	108	57		