

Luminaire

Code BM8000x_BM82000_M
 Name Hoy Spot - semi-rec./rec. 927 - M

Measurment.

Code RDN190403
 Name Hoy Spot - semi-rec./rec. 927 - M


Luminaire Flux	1759.13 lm	Luminaire Power	19.00 W	Efficacy	92.59 lm/W	Efficiency	100.00%
Sources Flux	1759.13 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	110 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area			0.004301 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001040 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		10-05-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1759.13 lm

LED Flux=2253lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=93lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6k)=50000h

C.I.E. 98 100 100 100 100
 F UTE -

D DIN 5040 A60
 B NBN BZ 1


Diam=90mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

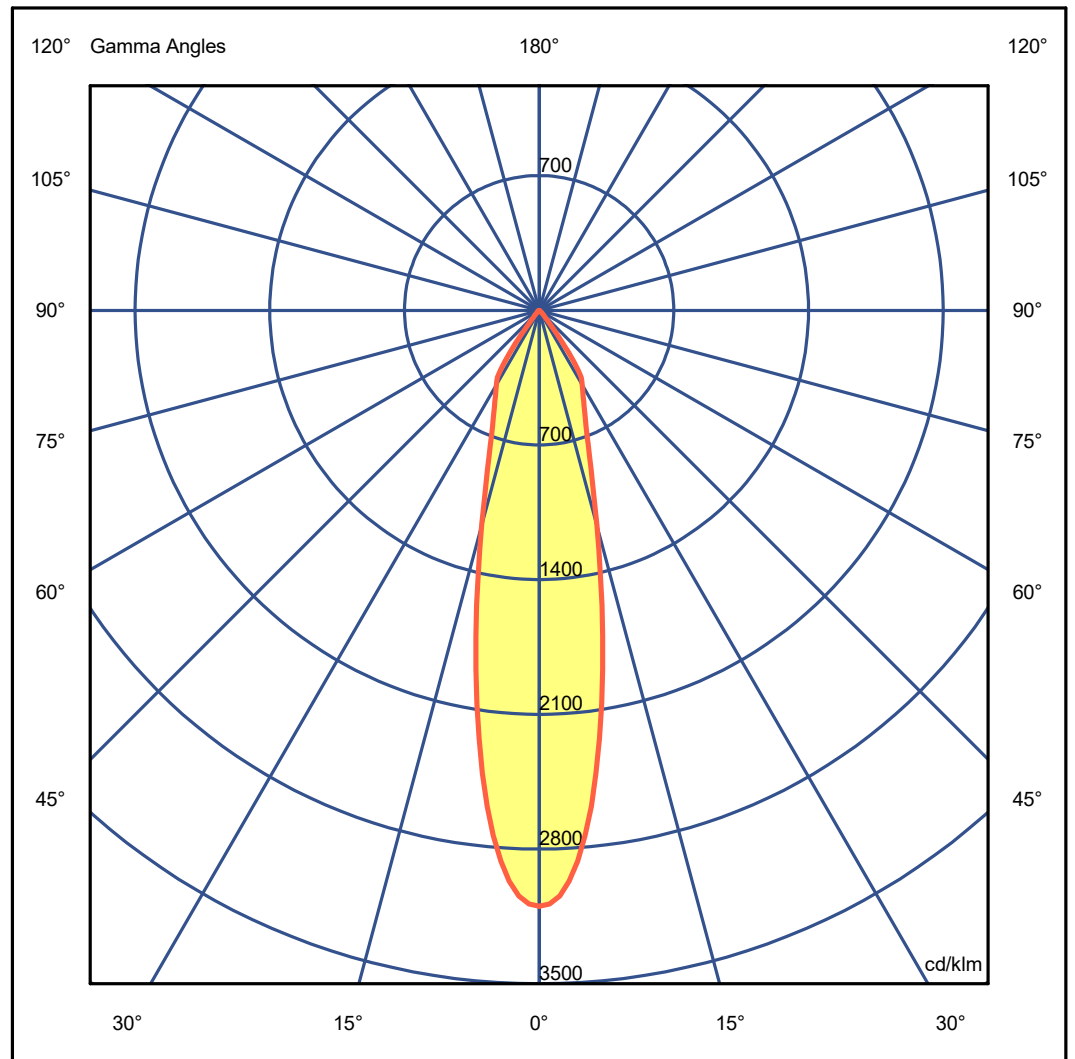

Luminaire

Code BM8000x_BM82000_M
 Name Hoy Spot - semi-rec./rec. 927 - M

Measurem.


Code RDN190403
 Name Hoy Spot - semi-rec./rec. 927 - M

Luminaire Flux	1759.13 lm	Luminaire Power	19.00 W	Efficacy	92.59 lm/W	Efficiency	100.00%
Sources Flux	1759.13 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5446.53	4819.18	2030.62	969.50	465.64	42.03	10.02	4.89	1.43	0.39
OB	5446.53	4819.18	2030.62	969.50	465.64	42.03	10.02	4.89	1.43	0.39
OC	5446.53	4819.18	2030.62	969.50	465.64	42.03	10.02	4.89	1.43	0.39
OD	5446.53	4819.18	2030.62	969.50	465.64	42.03	10.02	4.89	1.43	0.39

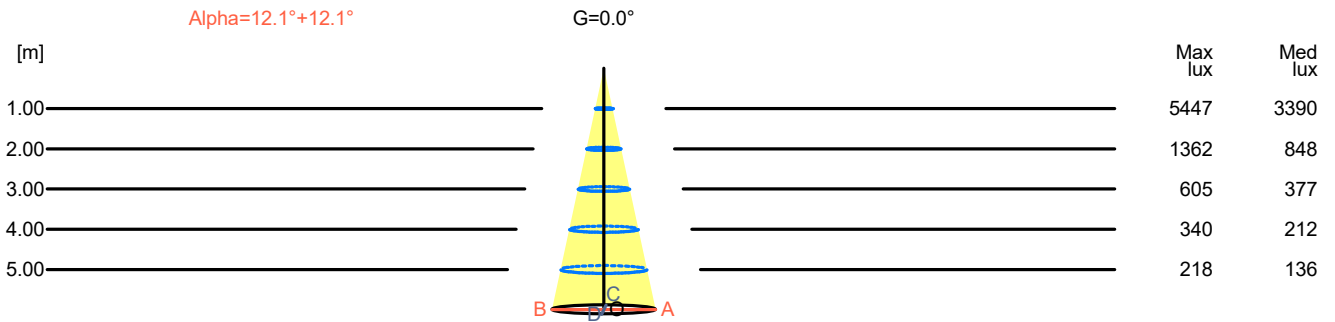

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5447	3390		
2.00	0.86	1362	848		
3.00	1.29	605	377		
4.00	1.72	340	212		
5.00	2.15	218	136		