

Luminaire

Code 1538118A
Name ALTROVE 600 LED C/W DIR UL

Measur.

Code FTS1700929
Name ALTROVE 600 LED C/W DIR UL


Luminaire Flux	3259.84 lm	Luminaire Power	80.00 W	Efficacy	40.75 lm/W	Efficiency	100.00%
Lamps Flux	3259.84 lm	Maximum value	246.49 cd/klm	Position	C=270.00 G=29.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	100 mm	Width	600 mm	Height	600 mm
Rectangular Luminous Area		Length	100 mm	Width	600 mm	Height	600 mm
Horizontal Luminous Area		0.060000 m2		Emitting area on Plane 180°		0.060000 m2	
Emitting area on Plane 0°		0.060000 m2		Emitting area on Plane 270°		0.360000 m2	
Emitting area on Plane 90°		0.360000 m2		Glare area at 76°		0.072733 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		30-10-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3259.84 lm	

LED Flux=8798,48lm LED Power=72W Eff=37% EfcLed=122lm/W EfcLum=41lm/W Ra=90 SDCM=3 L90(6K)=50000h

C.I.E. 43 76 94 50 100

D DIN 5040

C31

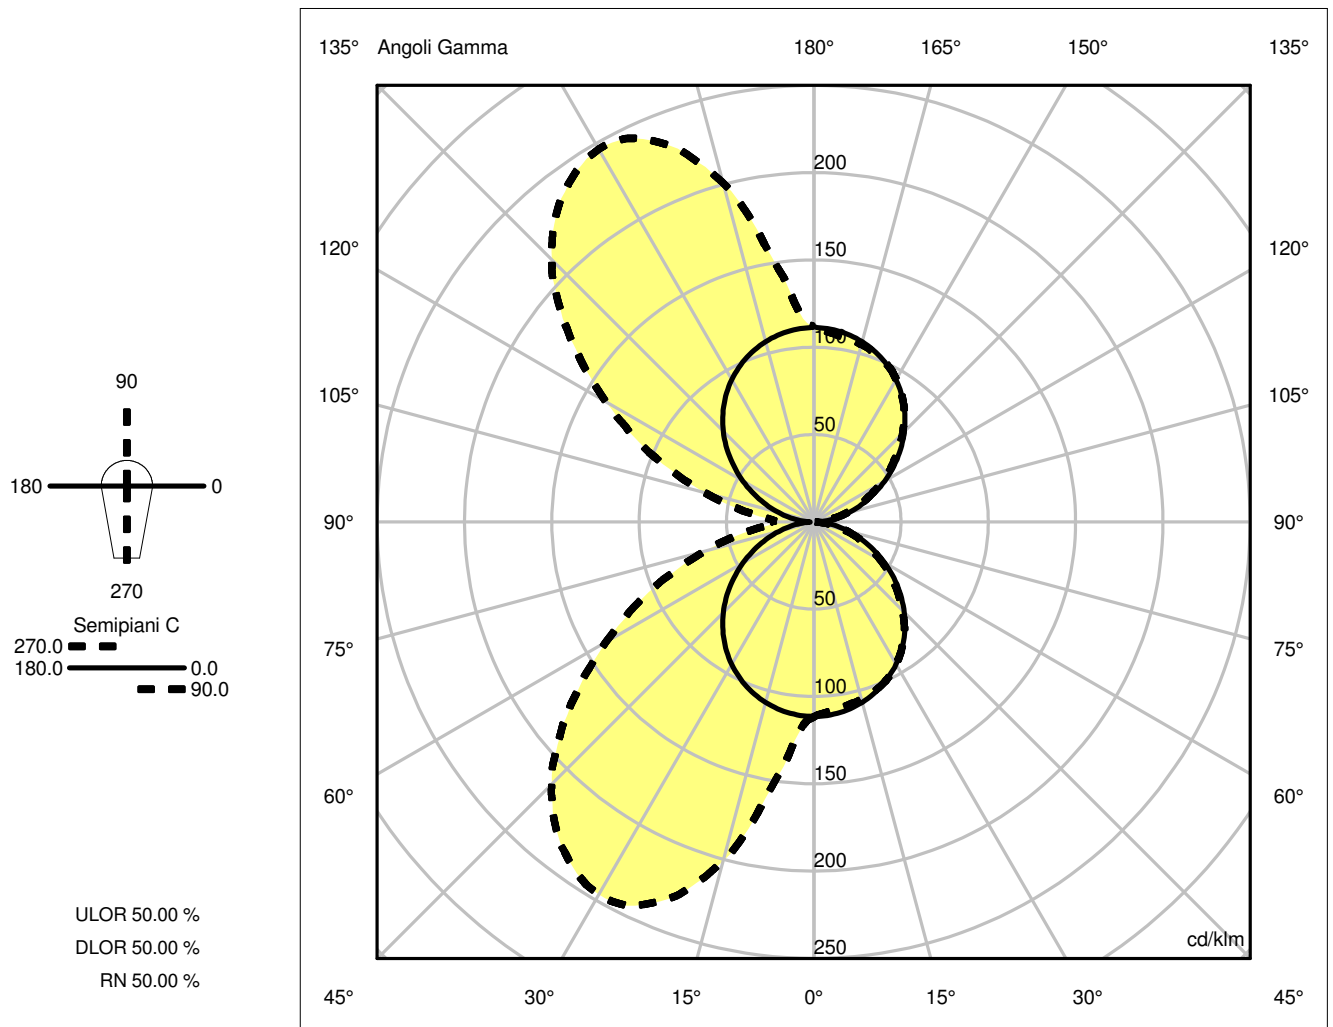

Luminaire

Code 1538118A
Name ALTROVE 600 LED C/W DIR UL

Measur.

Code FTS1700929
Name ALTROVE 600 LED C/W DIR UL


Luminaire Flux	3259.84 lm	Luminaire Power	80.00 W	Efficacy	40.75 lm/W	Efficiency	100.00%
Lamps Flux	3259.84 lm	Maximum value	246.49 cd/klm	Position	C=270.00 G=29.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	100 mm	Width	600 mm	Height	600 mm
Rectangular Luminous Area		Length	100 mm	Width	600 mm	Height	600 mm
Horizontal Luminous Area	0.060000 m2			Emitting area on Plane 180°			0.060000 m2
Emitting area on Plane 0°	0.060000 m2			Emitting area on Plane 270°			0.360000 m2
Emitting area on Plane 90°	0.360000 m2			Glare area at 76°			0.072733 m2
Coordinate system	CG Roads			Symmetry Type		Sym. on planes 270-90	
Date	30-10-2017			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		3259.84 lm	
LED Flux=8798,48lm LED Power=72W Eff=37% EfcLed=122lm/W EfcLum=41lm/W Ra=90 SDCM=3 L90(6K)=50000h							
C.I.E.	43 76 94 50 100			D DIN 5040		C31	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.43	2.86	4.29	5.72	7.15	OC	1.37	2.75	4.12	5.49	6.86
OB	1.43	2.86	4.29	5.72	7.15	OD	4.36	8.71	13.07	17.42	21.78

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	364.46	361.34	348.47	323.54	286.95	238.79	182.44	123.17	67.51	21.46
OB	364.46	361.34	348.47	323.54	286.95	238.79	182.44	123.17	67.51	21.46
OC	364.46	354.57	342.79	323.93	287.35	235.10	175.79	116.61	62.65	15.65
OD	364.46	409.76	656.20	790.07	785.53	692.21	533.05	365.75	210.79	91.65

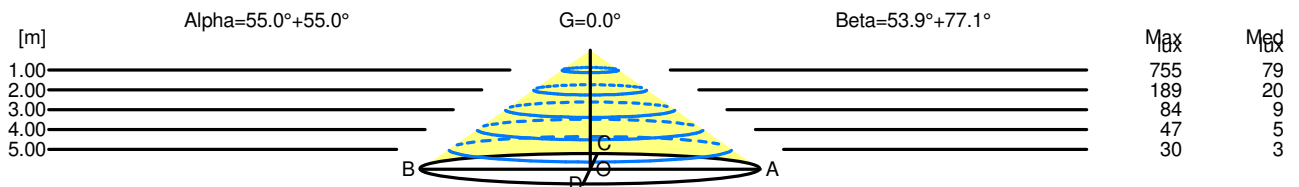

H[m]	D[m]	Max lux	Med lux	Alpha=55.0°+55.0°	G=0.0
1.00	2.86	755	79		
2.00	5.72	189	20		
3.00	8.58	84	9		
4.00	11.44	47	5		
5.00	14.30	30	3		

H[m]	D[m]	Max lux	Med lux	Beta=77.1°+53.9°	G=0.0
1.00	5.73	755	79		
2.00	11.46	189	20		
3.00	17.18	84	9		
4.00	22.91	47	5		
5.00	28.64	30	3		