


Luminaire

Code 1815118A
Name EMPATIA 16 LED S DIMM UL

Measurem.

Code FTS1701351
Name EMPATIA 16 LED S DIMM UL

Luminaire Flux	567.00 lm	Luminaire Power	11.00 W	Efficacy	51.55 lm/W	Efficiency	100.00%
Lamps Flux	567.00 lm	Maximum value	358.51 cd/klm	Position	C=0.00 G=7.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	160 mm 160 mm	Height Height	200 mm 145 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.020106 m2 0.023200 m2 0.023200 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.023200 m2 0.023200 m2 0.027375 m2	
Coordinate system Date Measurement Distance		CG 16-01-2000 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 567.00 lm	
LED Flux=1027,13lm LED Power=9,4W Eff=55% EfcLed=109lm/W EfcLum=52lm/W Ra=90 SDCM=2 L70(6K)=36300h							
C.I.E. F UTE	55 81 94 77 100 0.77 D + 0.23 T			D DIN 5040 B NBN		B41 BZ 3 / 0.8 / BZ 4	

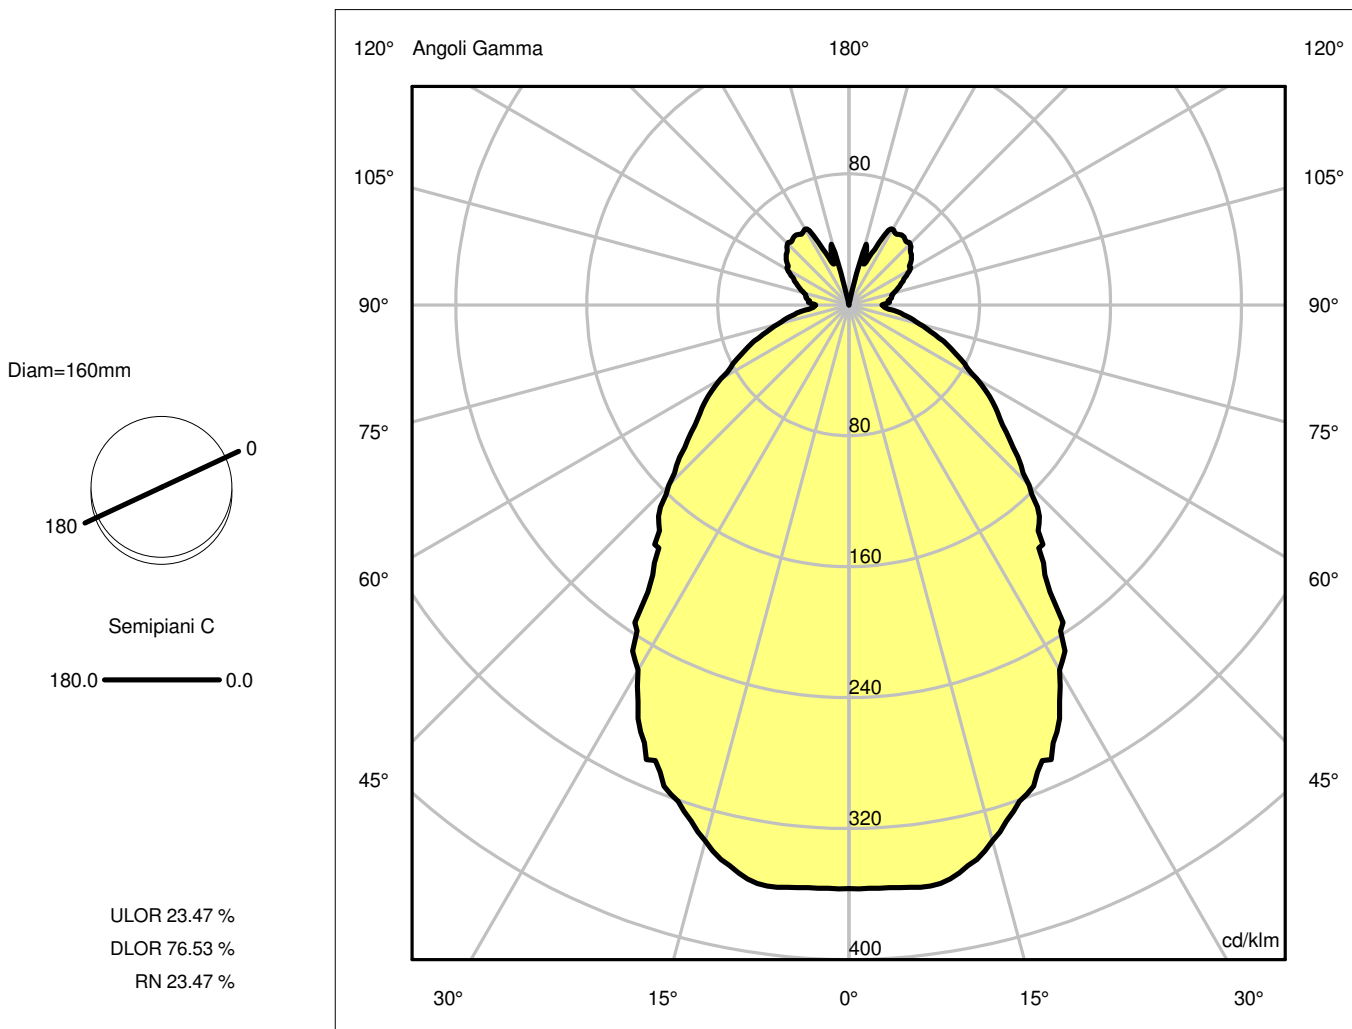

Luminaire

Code 1815118A
Name EMPATIA 16 LED S DIMM UL

Measurerm.


Code FTS1701351
Name EMPATIA 16 LED S DIMM UL

Luminaire Flux	567.00 lm	Luminaire Power	11.00 W	Efficacy	51.55 lm/W	Efficiency	100.00%
Lamps Flux	567.00 lm	Maximum value	358.51 cd/klm	Position	C=0.00 G=7.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	160 mm 160 mm	Height Height	200 mm 145 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.020106 m2 0.023200 m2 0.023200 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.023200 m2 0.023200 m2 0.027375 m2	
Coordinate system Date Measurement Distance		CG 16-01-2000 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 567.00 lm	
LED Flux=1027,13lm LED Power=9,4W Eff=55% EfcLed=109lm/W EfcLum=52lm/W Ra=90 SDCM=2 L70(6K)=36300h							
C.I.E. F UTE	55 81 94 77 100 0.77 D + 0.23 T			D DIN 5040 B NBN	B41 BZ 3 / 0.8 / BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.85	1.69	2.54	3.39	4.23	OC	0.85	1.69	2.54	3.39	4.23
OB	0.85	1.69	2.54	3.39	4.23	OD	0.85	1.69	2.54	3.39	4.23

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	202.20	202.56	192.24	167.44	121.39	88.29	62.06	41.53	25.28	13.05
OB	202.20	202.56	192.24	167.44	121.39	88.29	62.06	41.53	25.28	13.05
OC	202.20	202.56	192.24	167.44	121.39	88.29	62.06	41.53	25.28	13.05
OD	202.20	202.56	192.24	167.44	121.39	88.29	62.06	41.53	25.28	13.05

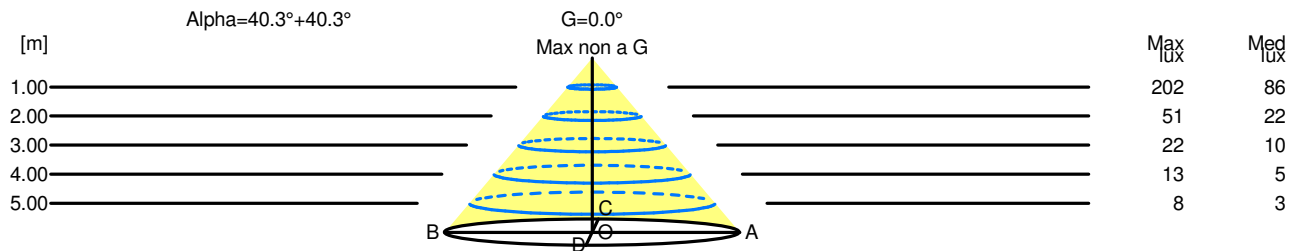

H[m]	D[m]	Max lux	Med lux	Alpha=40.3°+40.3°	G=0.0 Max non a G
1.00	1.69	202	86		
2.00	3.39	51	22		
3.00	5.08	22	10		
4.00	6.77	13	5		
5.00	8.47	8	3		