

## Luminaire


Code 1275018A  
Name NH S2 22 UL

## Measurem.

Code FTS2000214  
Name NH S2 22 UL

Luminaire Flux	1141.79 lm	Luminaire Power	13.50 W	Efficacy	84.58 lm/W	Efficiency	75.07%
Lamps Flux	1521.00 lm	Maximum value	100.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 220 mm Diam. 220 mm	Height	220 mm	Height	220 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.038013 m2 0.048400 m2 0.048400 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.048400 m2 0.048400 m2 0.056159 m2	
Coordinate system Date Measurement Distance	CG 02-07-2018 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux				Rotosymmetrical 180 1521.00 lm	
LED SSW 100W A67 E27 WW FR ND 1BC/6							
C.I.E. F UTE	30 57 80 67 75 0.50 J + 0.25 T	D DIN 5040 B NBN		B11 BZ 7			

Diam=220mm




Semipiani C

180.0 ——— 0.0

ULOR 25.02 %

DLOR 50.05 %

RN 33.33 %

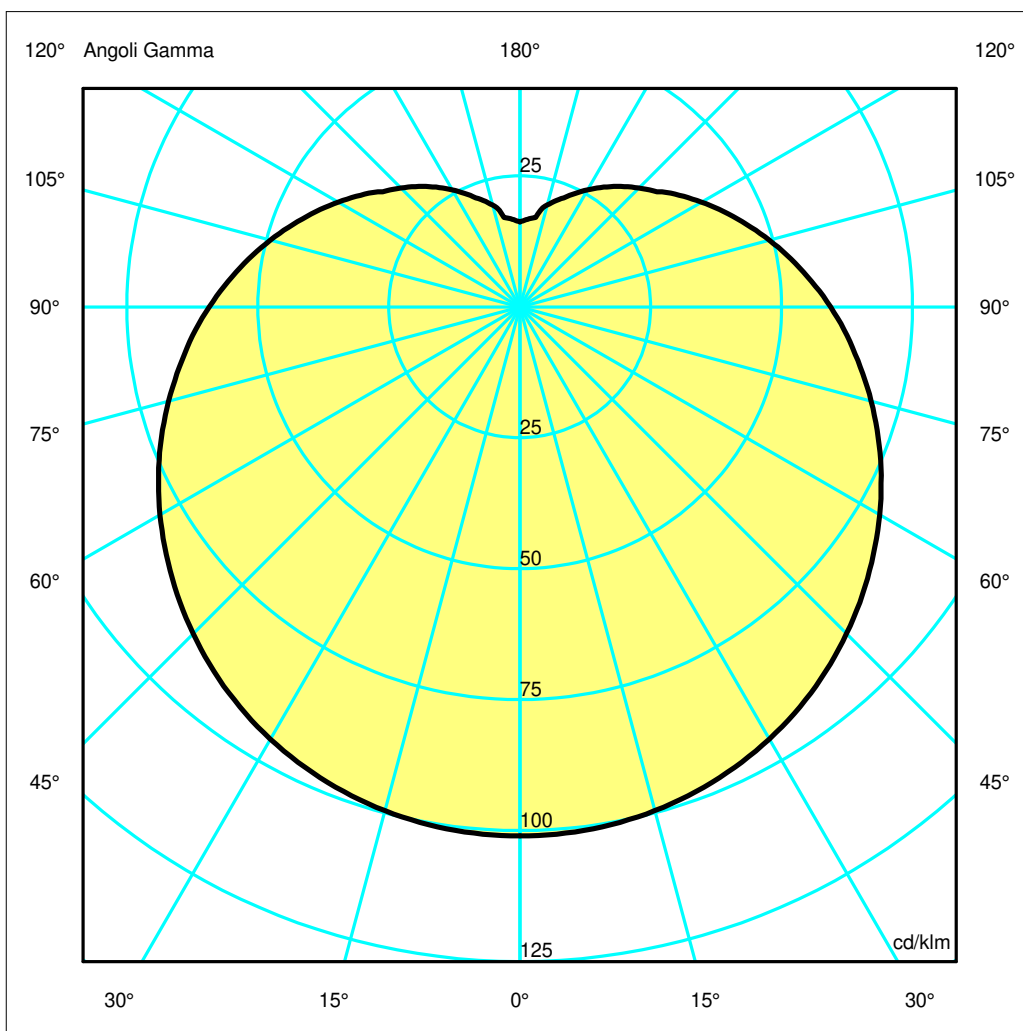

**Luminaire**

Code 1275018A  
Name NH S2 22 UL

**Measurem.**

Code FTS2000214  
Name NH S2 22 UL

Luminaire Flux	1141.79 lm	Luminaire Power	13.50 W	Efficacy	84.58 lm/W	Efficiency	75.07%
Lamps Flux	1521.00 lm	Maximum value	100.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	220 mm	Height	220 mm		
Round Luminous Area		Diam.	220 mm	Height	220 mm		
Horizontal Luminous Area		0.038013 m2		Emitting area on Plane 180°		0.048400 m2	
Emitting area on Plane 0°		0.048400 m2		Emitting area on Plane 270°		0.048400 m2	
Emitting area on Plane 90°		0.048400 m2		Glare area at 76°		0.056159 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1521.00 lm	
LED SSW 100W A67 E27 WW FR ND 1BC/6							
C.I.E.	30 57 80 67 75			D DIN 5040	B11		
F UTE	0.50 J + 0.25 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0