


## Luminaire

Code 1254118AEXT  
 Name PIRCE SUSP LED 28W 30K DIM 2-WIRE  
 Measurement WHITE EXT 19FT  
 Code FTS1701093  
 Name Pirce sospensione LED BIANCO 3000K - USA

Luminaire Flux	2509.23 lm	Luminaire Power	28.00 W	Efficacy	89.62 lm/W	Efficiency	100.00%
Lamps Flux	2509.23 lm	Maximum value	429.61 cd/klm	Position	C=0.00 G=177.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 960 mm Diam. 20 mm	Height	280 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000314 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.000076 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	07-10-2015	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			2509.23 lm		
LED Flux=3047,4lm LED Power=24W Eff=82% EfcLed=127lm/W EfcLum=90lm/W Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	32 55 81 7 100	D DIN 5040			--		
F UTE	0.07 H + 0.93 T	B NBN			BZ 6 / 1 / BZ 7		

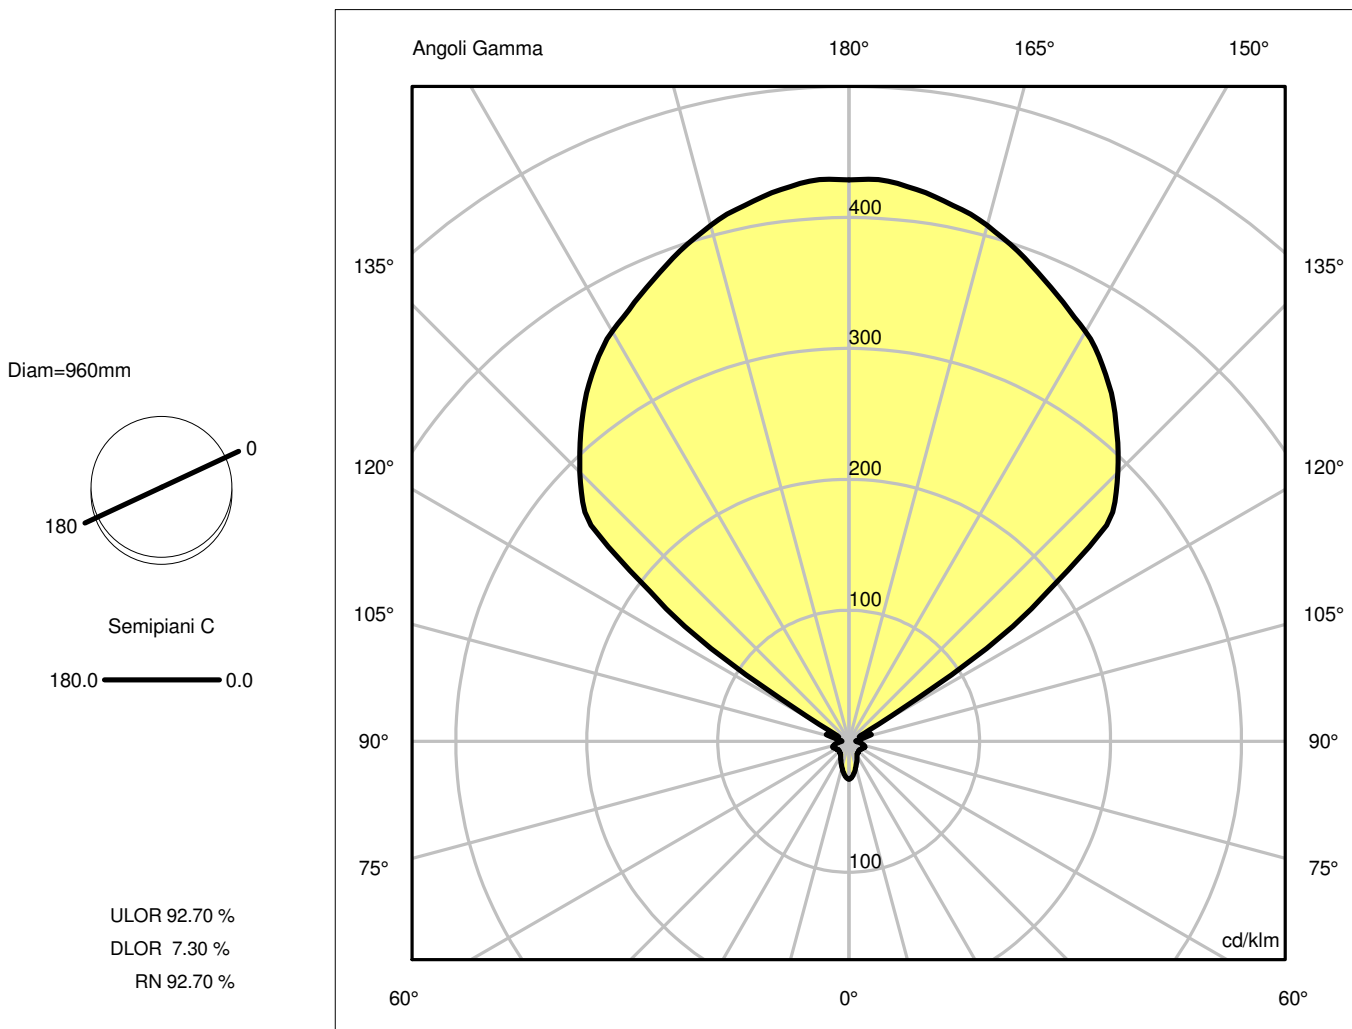

## Luminaire


Code 1254118AEXT  
 Name PIRCE SUSP LED 28W 30K DIM 2-WIRE  
 Measurement WHITE EXT 19FT  
 Code FTS1701093  
 Name Pirce sospensione LED BIANCO 3000K - USA

Luminaire Flux	2509.23 lm	Luminaire Power	28.00 W	Efficacy	89.62 lm/W	Efficiency	100.00%
Lamps Flux	2509.23 lm	Maximum value	429.61 cd/klm	Position	C=0.00 G=177.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 960 mm Diam. 20 mm	Height	280 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000314 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.000076 m2		
Coordinate system Date Measurement Distance	CG 07-10-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux			Rotosymmetrical 180 2509.23 lm		
LED Flux=3047,4lm LED Power=24W Eff=82% EfcLed=127lm/W EfcLum=90lm/W Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	32 55 81 7 100 0.07 H + 0.93 T	D DIN 5040 B NBN			-- BZ 6 / 1 / BZ 7		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.27	2.55	3.82	5.10	6.37	OC	1.27	2.55	3.82	5.10	6.37
OB	1.27	2.55	3.82	5.10	6.37	OD	1.27	2.55	3.82	5.10	6.37

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1076.01	1072.99	1023.72	944.45	858.33	728.75	383.71	23.53	38.00	15.21
OB	1076.01	1072.99	1023.72	944.45	858.33	728.75	383.71	23.53	38.00	15.21
OC	1076.01	1072.99	1023.72	944.45	858.33	728.75	383.71	23.53	38.00	15.21
OD	1076.01	1072.99	1023.72	944.45	858.33	728.75	383.71	23.53	38.00	15.21

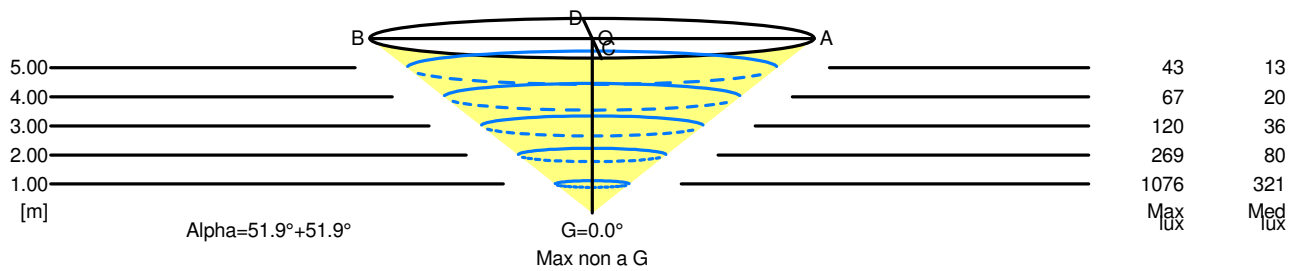

5.00	12.75	43	13	
4.00	10.20	67	20	
3.00	7.65	120	36	
2.00	5.10	269	80	
1.00	2.55	1076	321	
H[m]	D[m]	Max lux	Med lux	Alpha=51.9°+51.9° Max non a G G=0.0