

**Luminaire**

Code 2061018A 29W  
 Name RIPPLE 70 SOSPENSIONE 0/10V

**Measur.**

Code FTS2000799  
 Name RIPPLE 70 SOSPENSIONE 0/10V

Luminaire Flux	2565.51 lm	Luminaire Power	29.00 W	Efficacy	88.47 lm/W	Efficiency	100.00%
Sources Flux	2565.51 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	700 mm	Height	30 mm		
Round Luminous Area		Diam.	650 mm	Height	0 mm		
Horizontal Luminous Area			0.331831 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.080277 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		09-09-2021		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2565.51 lm


LED Flux=5054lm LED Power=27W Eff=51% EfcLed=187lm/W EfcLum=88lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 47 79 96 100 100  
 F UTE 1.00 E

D DIN 5040  
 B NBN

A30  
 BZ 5 / 1.25 / BZ 4

Diam=700mm




C Halfplanes

180.0 — 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

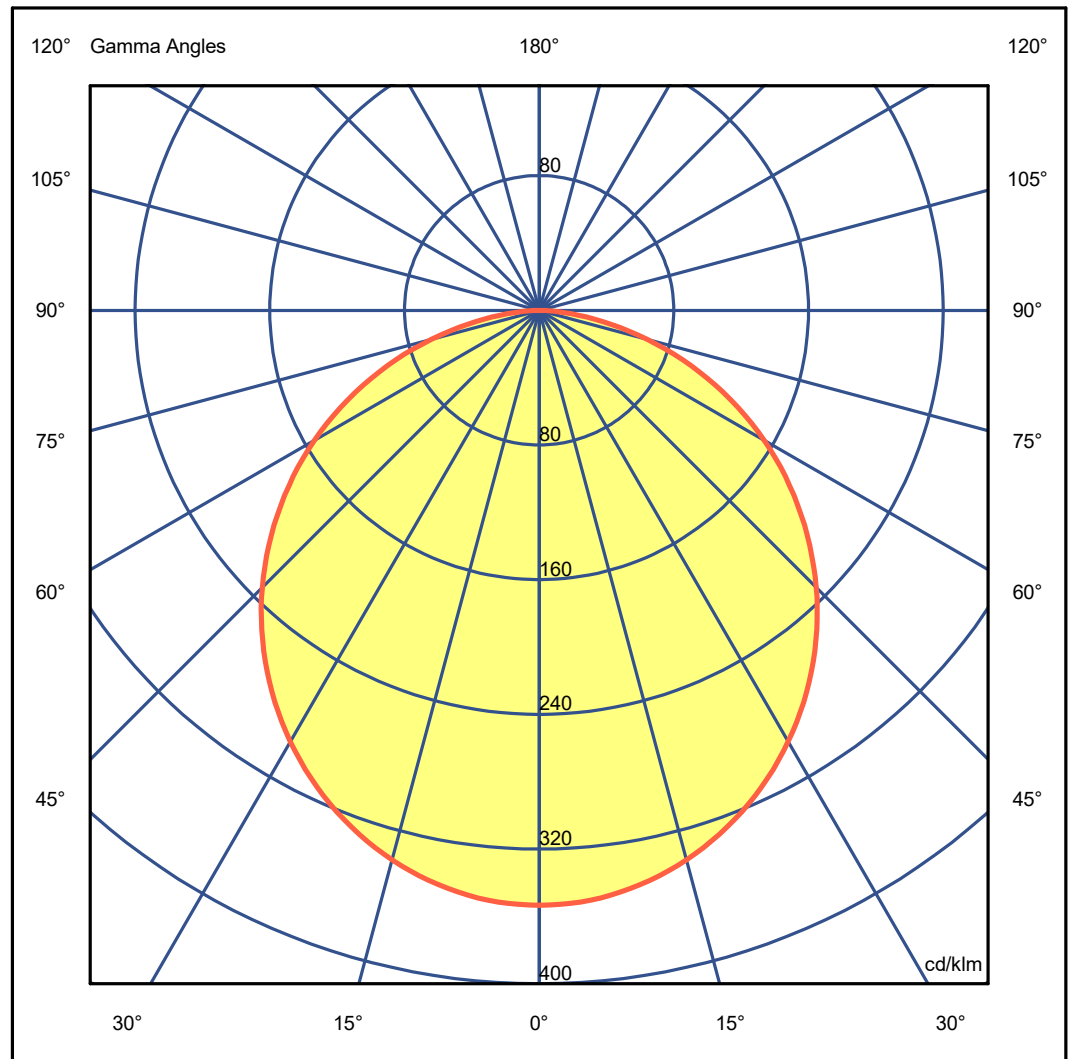

## Luminaire

Code 2061018A 29W  
Name RIPPLE 70 SOSPENSIONE 0/10V

## Measurem.


Code FTS2000799  
Name RIPPLE 70 SOSPENSIONE 0/10V

Luminaire Flux	2565.51 lm	Luminaire Power	29.00 W	Efficacy	88.47 lm/W	Efficiency	100.00%
Sources Flux	2565.51 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.96	4.44	5.91	7.39	OC	1.48	2.96	4.44	5.91	7.39
OB	1.48	2.96	4.44	5.91	7.39	OD	1.48	2.96	4.44	5.91	7.39

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	906.38	901.93	866.61	801.31	709.91	596.84	465.90	321.78	170.27	38.50
OB	906.38	901.93	866.61	801.31	709.91	596.84	465.90	321.78	170.27	38.50
OC	906.38	901.93	866.61	801.31	709.91	596.84	465.90	321.78	170.27	38.50
OD	906.38	901.93	866.61	801.31	709.91	596.84	465.90	321.78	170.27	38.50

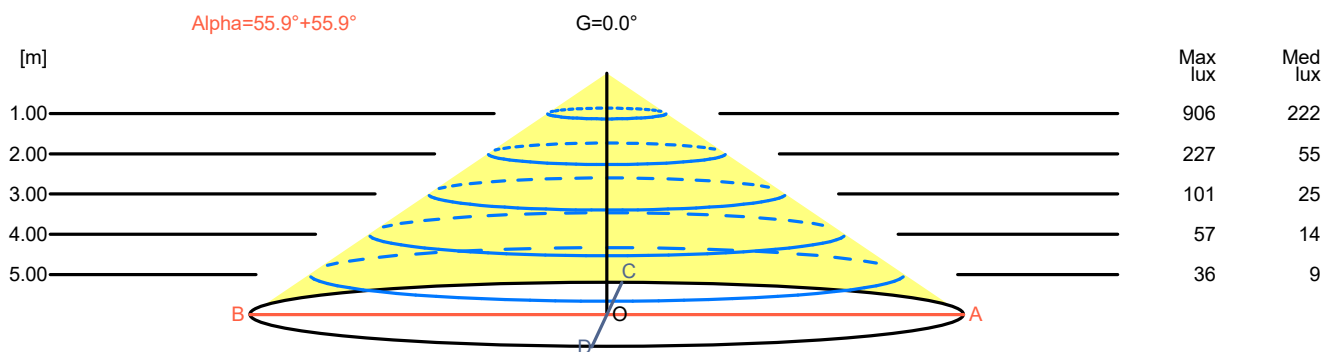

H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°	G=0.0
1.00	2.96	906	222		
2.00	5.91	227	55		
3.00	8.87	101	25		
4.00	11.83	57	14		
5.00	14.79	36	9		