


## Luminaire

Code 1103018A  
 Name YANZI S UL  
**Measurem.**  
 Code FTS1800254  
 Name YANZI S UL

Luminaire Flux	640.41 lm	Luminaire Power	10.00 W	Efficacy	64.04 lm/W	Efficiency	100.00%
Lamps Flux	640.41 lm	Maximum value	120.64 cd/klm	Position	C=85.00 G=110.00	CG	Asymmetrical
Round Luminaire Round Luminous Area	Diam. 500 mm Diam. 500 mm	Height	600 mm	Height	600 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.196350 m2 0.300000 m2 0.300000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.300000 m2 0.300000 m2 0.338590 m2		
Coordinate system Date Measurement Distance	CG 21-12-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux			Asymmetrical 180 640.41 lm		
LED Flux=841,1lm LED Power=8W Eff=76% EfcLed=105lm/W EfcLum=64lm/W L70(6K)=50000h							
C.I.E. F UTE	20 43 70 45 100 0.45 J + 0.55 T	D DIN 5040 B NBN		C12 BZ 9			

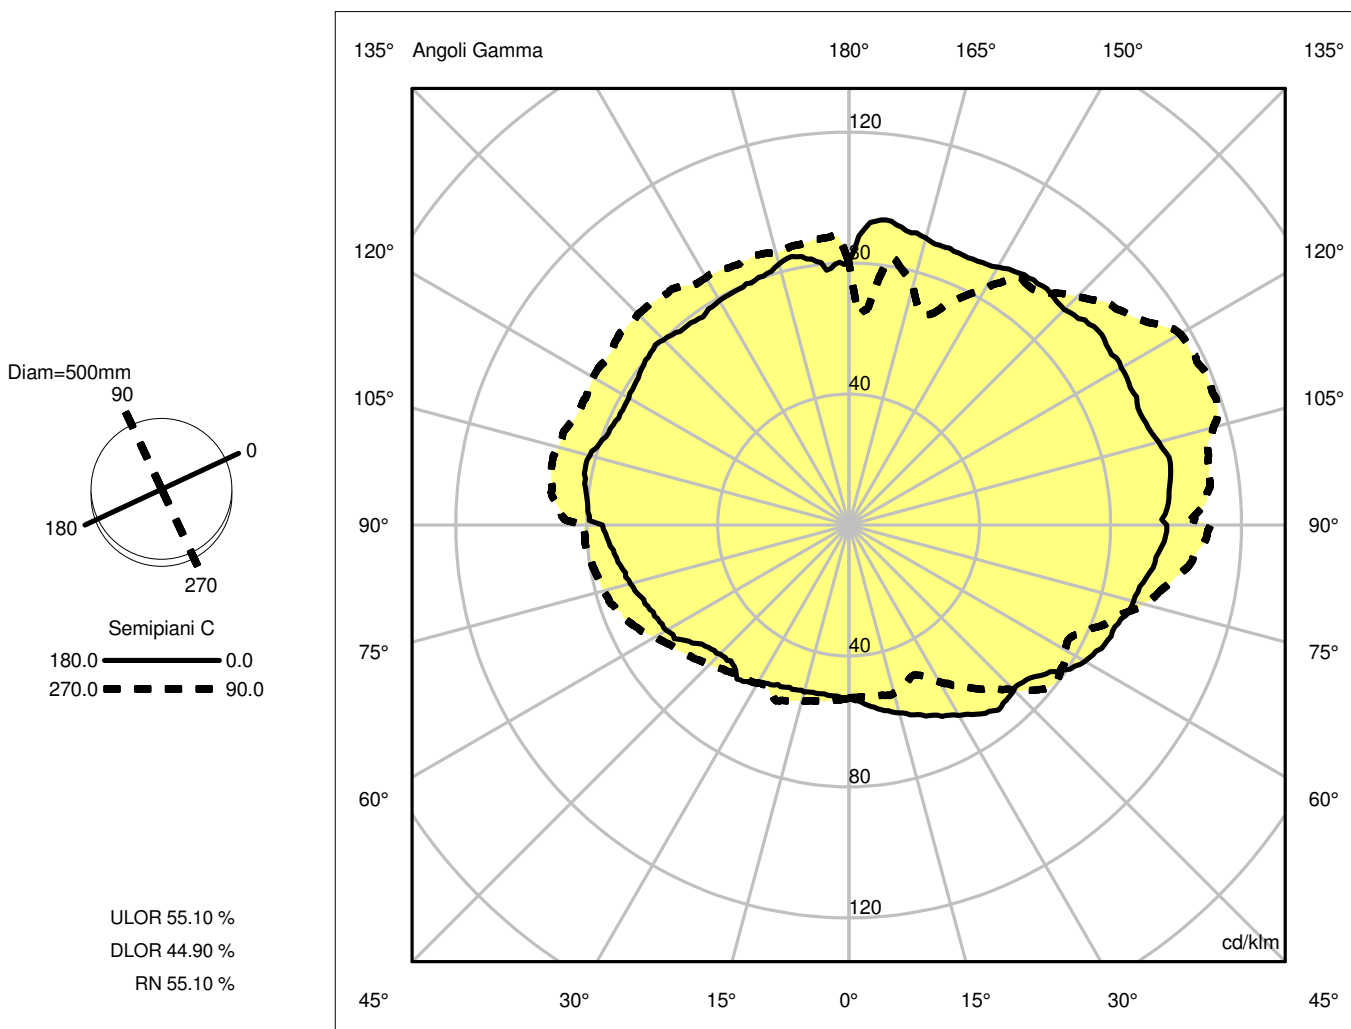

**Luminaire**

Code 1103018A  
Name YANZI S UL

**Measur.**

Code FTS1800254  
Name YANZI S UL

Luminaire Flux	640.41 lm	Luminaire Power	10.00 W	Efficacy	64.04 lm/W	Efficiency	100.00%
Lamps Flux	640.41 lm	Maximum value	120.64 cd/klm	Position	C=85.00 G=110.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	500 mm 500 mm	Height Height	600 mm 600 mm		
Horizontal Luminous Area		0.196350 m2		Emitting area on Plane 180°		0.300000 m2	
Emitting area on Plane 0°		0.300000 m2		Emitting area on Plane 270°		0.300000 m2	
Emitting area on Plane 90°		0.300000 m2		Glare area at 76°		0.338590 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		21-12-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		640.41 lm	
LED Flux=841,1lm LED Power=8W Eff=76% EfcLed=105lm/W EfcLum=64lm/W L70(6K)=50000h							
C.I.E.	20 43 70 45 100			D DIN 5040	C12		
F UTE	0.45 J + 0.55 T			B NBN	BZ 9		

Apertura a destra non trovata, gamma =79

Apertura a destra non trovata, gamma =79

Apertura a destra non trovata, gamma =79