

## Luminaire

Code 0150170A  
Name BONTA' CORPO+PIATTO VETRO GRIGIO

## Measurement

Code FTS2101859  
Name BONTA' CORPO+PIATTO VETRO GRIGIO

Luminaire Flux	242.35 lm	Luminaire Power	2.40 W	Efficacy	100.98 lm/W	Efficiency	100.00%
Sources Flux	242.35 lm	Maximum value	109.82 cd/klm	Position	C=0.00 G=138.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	176 mm		
Round Luminous Area		Diam.	120 mm	Height	145 mm		
Horizontal Luminous Area		0.011310 m <sup>2</sup>		Emitting area on Plane 180°		0.017400 m <sup>2</sup>	
Emitting area on Plane 0°		0.017400 m <sup>2</sup>		Emitting area on Plane 270°		0.017400 m <sup>2</sup>	
Emitting area on Plane 90°		0.017400 m <sup>2</sup>		Glare area at 76°		0.019619 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-03-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		242.35 lm	


LED Flux=338lm LED Power=2,5W Eff=72% EfcLed=135lm/W EfcLum=97lm/W CCT=2700 Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 11 34 64 36 100  
F UTE --

D DIN 5040  
B NBN

D12  
BZ 10

Diam=120mm




Semipiani C

180.0 ——— 0.0

ULOR 63.93 %

DLOR 36.07 %

RN 63.93 %

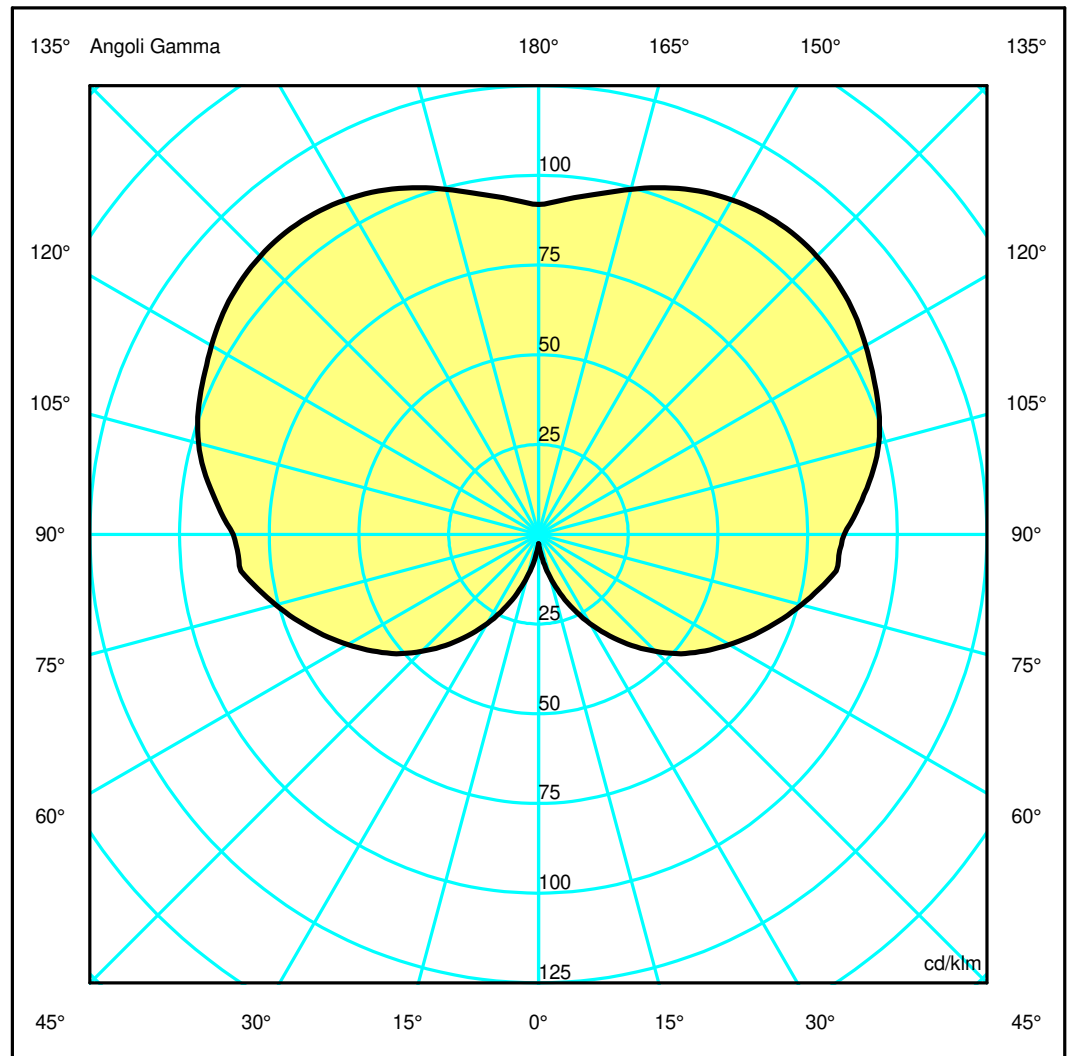

**Luminaire**

Code 0150170A  
Name BONTA' CORPO+PIATTO VETRO GRIGIO

**Measur.**

Code FTS2101859  
Name BONTA' CORPO+PIATTO VETRO GRIGIO

Luminaire Flux	242.35 lm	Luminaire Power	2.40 W	Efficacy	100.98 lm/W	Efficiency	100.00%
Sources Flux	242.35 lm	Maximum value	109.82 cd/klm	Position	C=0.00 G=138.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	176 mm		
Round Luminous Area		Diam.	120 mm	Height	145 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.017400 m2	
Emitting area on Plane 0°		0.017400 m2		Emitting area on Plane 270°		0.017400 m2	
Emitting area on Plane 90°		0.017400 m2		Glare area at 76°		0.019619 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-03-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		242.35 lm	
LED Flux=338lm LED Power=2,5W Eff=72% EfcLed=135lm/W EfcLum=97lm/W CCT=2700 Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	11 34 64 36 100			D DIN 5040	D12		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =42

Apertura a destra non trovata, gamma =42