


## Luminaire

Code 1751028A  
Name LA PETITE table white - USA


## Measur.

Code FTS1700797  
Name LA PETITE table white - USA

Luminaire Flux	325.82 lm	Luminaire Power	6.00 W	Efficacy	54.30 lm/W	Efficiency	65.29%
Lamps Flux	499.00 lm	Maximum value	206.42 cd/klm	Position	C=0.00 G=0.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	190 mm 188 mm	Height Height	367 mm 0 mm		
Horizontal Luminous Area	0.027759 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006716 m2		
Coordinate system	CG			Symmetry Type	Asymmetrical		
Date	28-09-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	499.00 lm		
LAMP. LED 6W E14 2700K FROST P40							
C.I.E.	48 79 96 85 65			D DIN 5040	B31		
F UTE	0.56 E + 0.10 T			B NBN	BZ 4		



ULOR 9.63 %  
DLOR 55.67 %  
RN 14.74 %

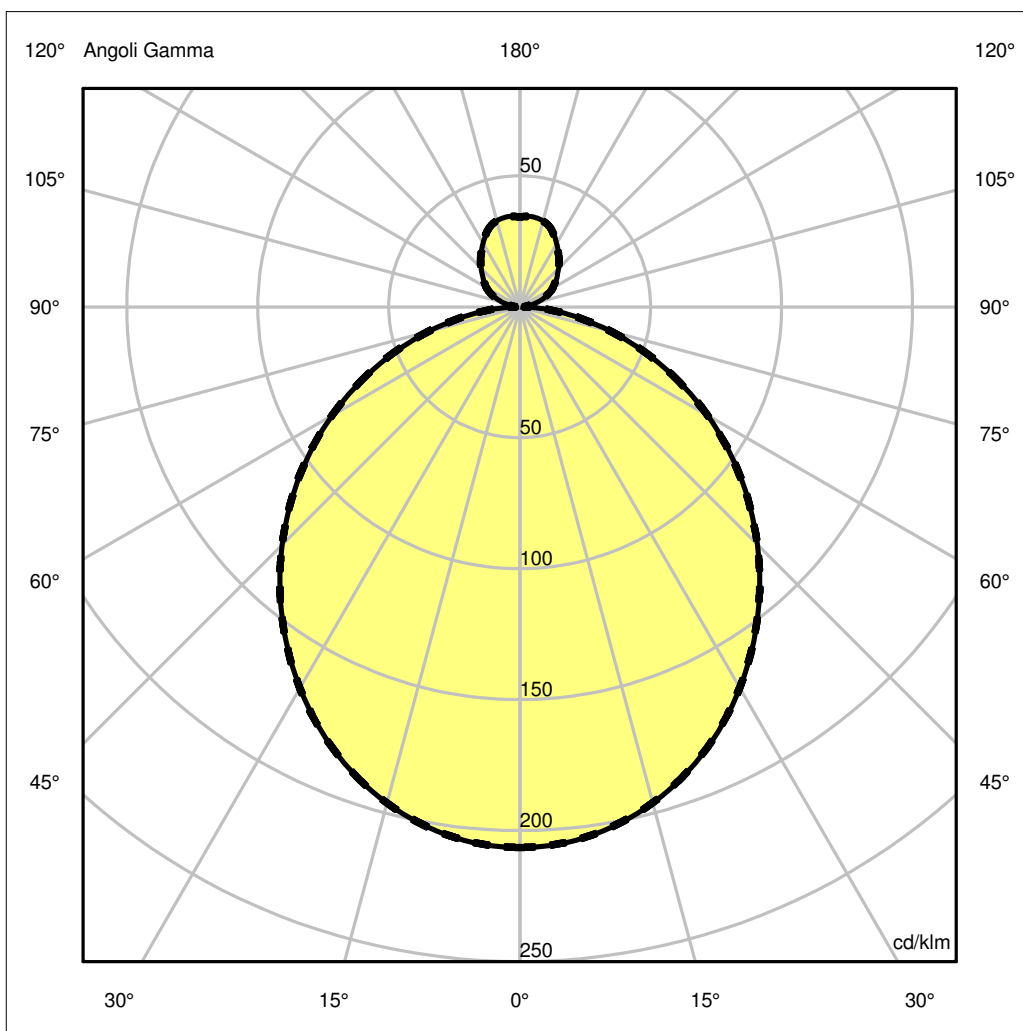

## Luminaire

Code 1751028A  
Name LA PETITE table white - USA

## Measurment.


Code FTS1700797  
Name LA PETITE table white - USA

Luminaire Flux	325.82 lm	Luminaire Power	6.00 W	Efficacy	54.30 lm/W	Efficiency	65.29%
Lamps Flux	499.00 lm	Maximum value	206.42 cd/klm	Position	C=0.00 G=0.00	CG	Asymmetrical
Round Luminaire		Diam.	190 mm	Height	367 mm		
Round Luminous Area		Diam.	188 mm	Height	0 mm		
Horizontal Luminous Area	0.027759 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006716 m2		
Coordinate system	CG			Symmetry Type	Asymmetrical		
Date	28-09-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	499.00 lm		
LAMP. LED 6W E14 2700K FROST P40							
C.I.E.	48 79 96 85 65			D DIN 5040	B31		
F UTE	0.56 E + 0.10 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.35	2.69	4.04	5.39	6.73	OC	1.35	2.69	4.04	5.39	6.73
OB	1.35	2.69	4.04	5.39	6.73	OD	1.35	2.69	4.04	5.39	6.73

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	103.00	102.42	97.86	89.31	77.71	64.02	49.05	33.36	17.85	4.88
OB	103.00	102.42	97.86	89.31	77.71	64.02	49.05	33.36	17.85	4.88
OC	103.00	102.42	97.86	89.31	77.71	64.02	49.05	33.36	17.85	4.88
OD	103.00	102.42	97.86	89.31	77.71	64.02	49.05	33.36	17.85	4.88

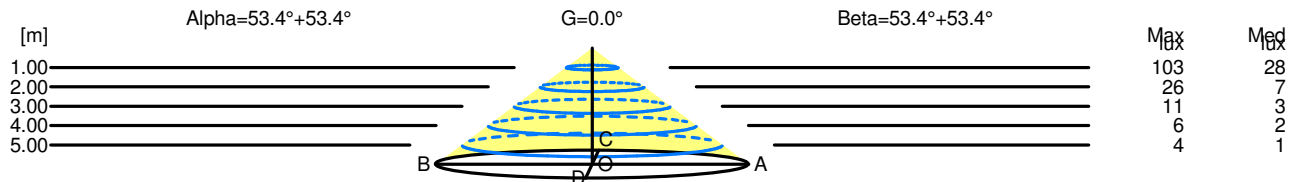

H[m]	D[m]	Max lux	Med lux	Alpha=53.4°+53.4°	G=0.0
1.00	2.69	103	28		
2.00	5.39	26	7		
3.00	8.08	11	3		
4.00	10.77	6	2		
5.00	13.47	4	1		

H[m]	D[m]	Max lux	Med lux	Beta=53.4°+53.4°	G=0.0
1.00	2.69	103	28		
2.00	5.39	26	7		
3.00	8.08	11	3		
4.00	10.77	6	2		
5.00	13.47	4	1		