**Luminaire**
Code 1101018A
Name YANZI T
**Measurem.**
Code FTS1702513
Name YANZI T

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Luminaire Flux | 623.12 lm | Luminaire Power | 9.50 W | Efficacy | 65.59 lm/W | Efficiency | 100.00% |
| Lamps Flux | 623.12 lm | Maximum value | 102.21 cd/klm | Position | C=0.00 G=179.00 | CG | Rotosymmetrical |

| | | | |
|---|---|---|---|
| Round Luminaire | Diam. 100 mm | Height | 100 mm |
| Round Luminous Area | Diam. 100 mm | Height | 100 mm |
| Horizontal Luminous Area | 0.007854 m2 | Emitting area on Plane 180° | 0.010000 m2 |
| Emitting area on Plane 0° | 0.010000 m2 | Emitting area on Plane 270° | 0.010000 m2 |
| Emitting area on Plane 90° | 0.010000 m2 | Glare area at 76° | 0.011603 m2 |
| Coordinate system | CG | Symmetry Type | Rotosymmetrical |
| Date | 12-12-2017 | Maximum Gamma Angle | 180 |
| Measurement Distance | 0.00 | Measurement Flux | 623.12 lm |

LED Flux=741,1lm LED Power=7W Eff=84% EfcLed=106lm/W EfcLum=66lm/W L70(6K)=50000h

| | | | |
|---|---|---|---|
| C.I.E. | 10 33 64 38 100 | D DIN 5040 | D12 |
| F UTE | -- | B NBN | BZ 10 |

Diam=100mm




Semipiani C

180.0 0.0

ULOR 62.16 %
DLOR 37.84 %
RN 62.16 %

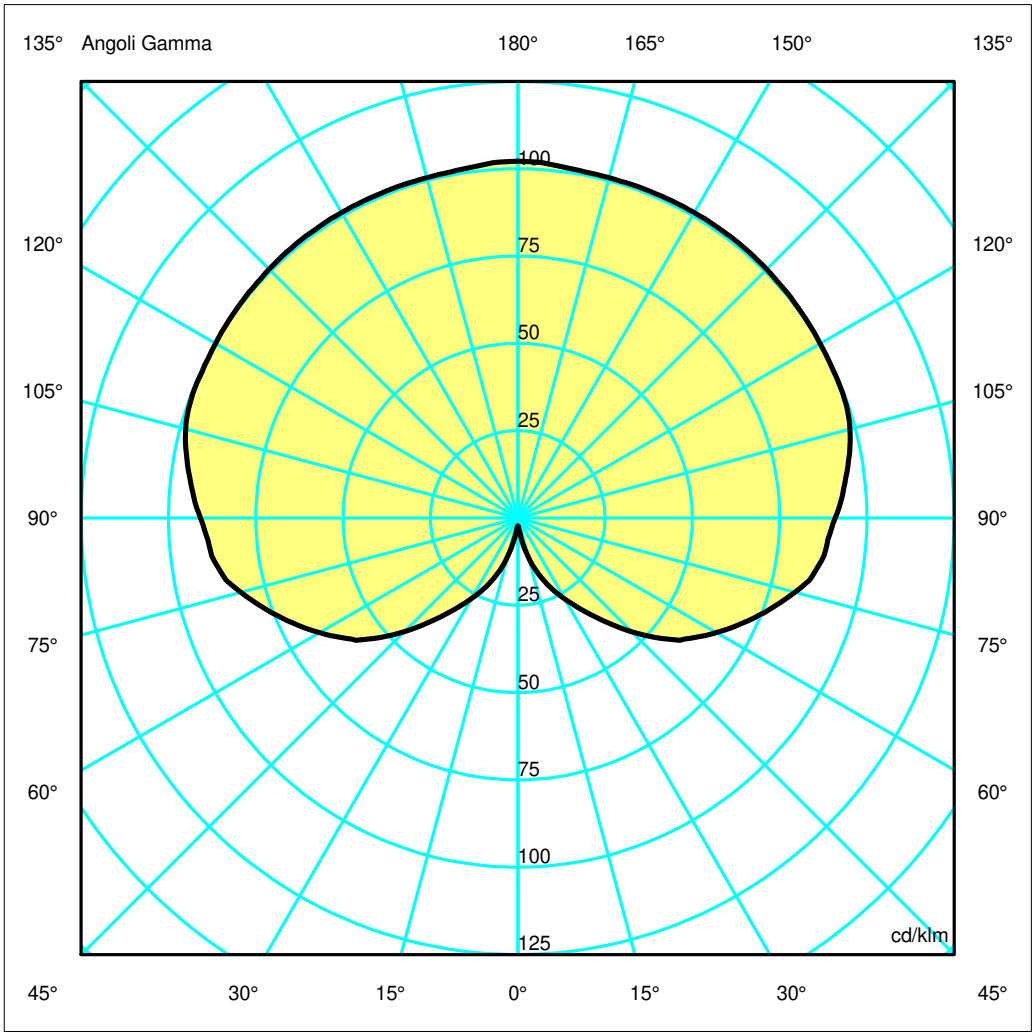

Artemide®

**Luminaire**
Code 1101010A
Name YANZI T
**Measurem.**
Code FTS1702513
Name YANZI T

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Luminaire Flux | 623.12 lm | Luminaire Power | 9.50 W | Efficacy | 65.59 lm/W | Efficiency | 100.00% |
| Lamps Flux | 623.12 lm | Maximum value | 102.21 cd/klm | Position | C=0.00 G=179.00 | CG | Rotosymmetrical |

| | | | |
|---|---|---|---|
| Round Luminaire | Diam. 100 mm | Height | 100 mm |
| Round Luminous Area | Diam. 100 mm | Height | 100 mm |
| Horizontal Luminous Area | 0.007854 m2 | Emitting area on Plane 180° | 0.010000 m2 |
| Emitting area on Plane 0° | 0.010000 m2 | Emitting area on Plane 270° | 0.010000 m2 |
| Emitting area on Plane 90° | 0.010000 m2 | Glare area at 76° | 0.011603 m2 |
| Coordinate system | CG | Symmetry Type | Rotosymmetrical |
| Date | 12-12-2017 | Maximum Gamma Angle | 180 |
| Measurement Distance | 0.00 | Measurement Flux | 623.12 lm |

LED Flux=741,1lm LED Power=7W Eff=84% EfcLed=106lm/W EfcLum=66lm/W L70(6K)=50000h

| | | | |
|---|---|---|---|
| C.I.E. | 10 33 64 38 100 | D DIN 5040 | D12 |
| F UTE | -- | B NBN | BZ 10 |

Apertura a destra non trovata, gamma =1

Apertura a destra non trovata, gamma =1