

## Luminaire


Code 1215A00A  
Name AOL MINI W A UPPERCASE

## Measurement

Code FTS2400007  
Name AOL MINI W A UPPERCASE

Luminaire Flux	1151 lm	Luminaire Power	11.0 W	Efficacy	104.636 lm/W	Efficiency	100.00%
Source Flux	1151 lm	Maximum value	186.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	355 mm	Width	245 mm	Height	42 mm	
Rectangular Luminous Area	Length	355 mm	Width	60 mm	Height	25 mm	
Horizontal Luminous Area	0.021300 m <sup>2</sup>		Emitting area on Plane 180°	0.008875 m <sup>2</sup>			
Emitting area on Plane 0°	0.008875 m <sup>2</sup>		Emitting area on Plane 270°	0.001500 m <sup>2</sup>			
Emitting area on Plane 90°	0.001500 m <sup>2</sup>		Glare area at 76°	0.013764 m <sup>2</sup>			
Coordinate system	CG		Symmetry Type	Rotosymmetrical			
Date	19-12-2023		Maximum Gamma Angle	180			
Measurement Distance	0.00		Measurement Flux	1151 lm			
LED Flux=1453lm LED Power=11W Eff=79% EfcLed=132lm/W EfcLum=105lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	36 65 86 72 100		D DIN 5040	B21			
F UTE	0.72 H + 0.28 T		B NBN	BZ 6			

355mm x 245mm




Sempiani C

180.0 ——— 0.0

ULOR 27.80 %

DLOR 72.20 %

RN 27.80 %

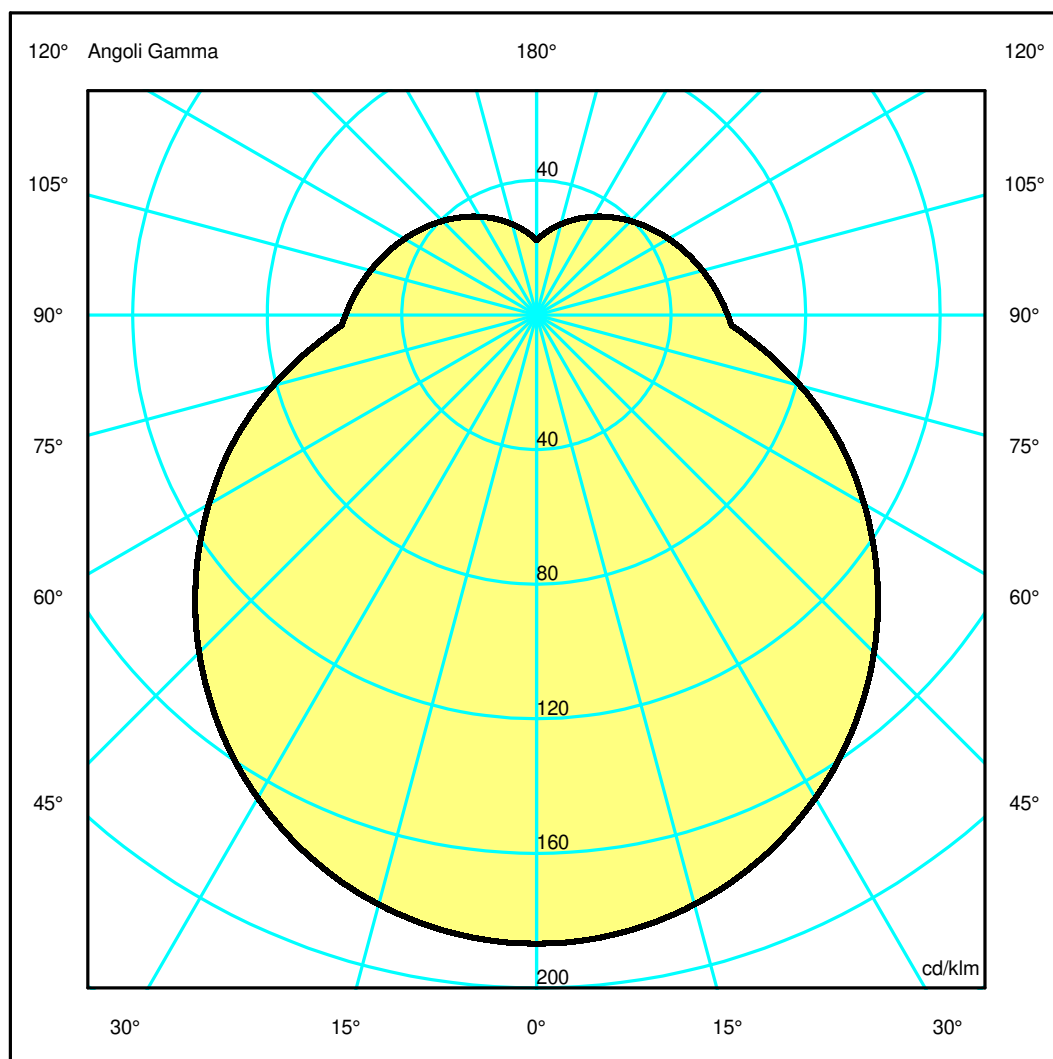

## Luminaire

Code 1215A00A  
Name AOL MINI W A UPPERCASE

## Measurerm.

Code FTS2400007  
Name AOL MINI W A UPPERCASE

Luminaire Flux	1151 lm	Luminaire Power	11.0 W	Efficacy	104.636 lm/W	Efficiency	100.00%
Source Flux	1151 lm	Maximum value	186.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	355 mm	Width	245 mm	Height	42 mm	
Rectangular Luminous Area	Length	355 mm	Width	60 mm	Height	25 mm	
Horizontal Luminous Area	0.021300 m <sup>2</sup>	Emitting area on Plane 180°	0.008875 m <sup>2</sup>	Emitting area on Plane 270°	0.001500 m <sup>2</sup>	Emitting area on Plane 90°	0.013764 m <sup>2</sup>
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	19-12-2023	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1151 lm				


LED Flux=1453lm LED Power=11W Eff=79% EfcLed=132lm/W EfcLum=105lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	36 65 86 72 100	D DIN 5040	B21
F UTE	0.72 H + 0.28 T	B NBN	BZ 6

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.64	5.28	7.91	10.55	13.19	OC	2.64	5.28	7.91	10.55	13.19
OB	2.64	5.28	7.91	10.55	13.19	OD	2.64	5.28	7.91	10.55	13.19

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	215.04	214.27	208.72	197.97	182.57	163.23	141.17	117.82	93.43	70.67
OB	215.04	214.27	208.72	197.97	182.57	163.23	141.17	117.82	93.43	70.67
OC	215.04	214.27	208.72	197.97	182.57	163.23	141.17	117.82	93.43	70.67
OD	215.04	214.27	208.72	197.97	182.57	163.23	141.17	117.82	93.43	70.67

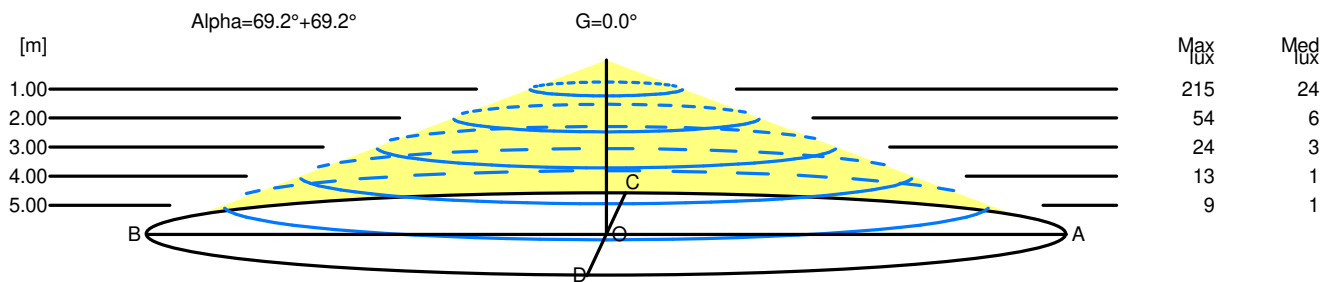

H[m]	D[m]	Max lux	Med lux	Alpha=69.2°+69.2°	G=0.0
1.00	5.28	215	24		
2.00	10.55	54	6		
3.00	15.83	24	3		
4.00	21.10	13	1		
5.00	26.38	9	1		