

Luminaire

Code 0918W18A
Name MESMERI WALL LED 27W 27K WHITE UNV - USA

Measurem.

Code FTS1701184
Name MESMERI WALL LED 27W 27K WHITE UNV - USA


Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Lamps Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area	0.007250 m ²	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.004350 m ²	Glare area at 76°					
Emitting area on Plane 90°	0.001500 m ²						
Coordinate system	CG	Symmetry Type		Sym. on planes 0-180			
Date	04-03-2014	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		2450.00 lm			

LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h

C.I.E. 31 55 70 8 100
F UTE 0.08 H + 0.92 T

D DIN 5040 --
B NBN BZ 7 / 2 / BZ 8 / 4 / BZ 9

340mm x 234mm




Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 91.98 %

DLOR 8.02 %

RN 91.98 %

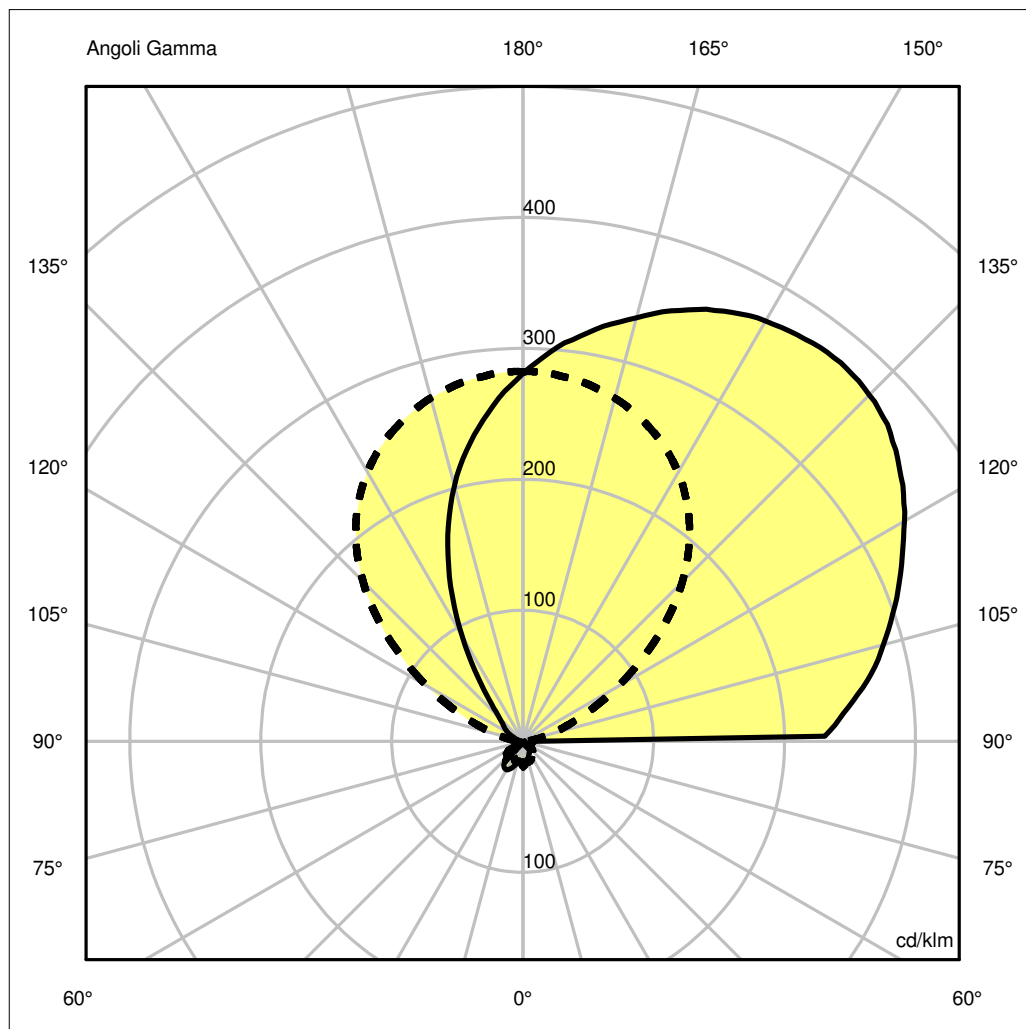

Luminaire

Code 0918W18A
Name MESMERI WALL LED 27W 27K WHITE UNV - USA

Measur.

Code FTS1701184
Name MESMERI WALL LED 27W 27K WHITE UNV - USA

Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Lamps Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area		0.007250 m2		Emitting area on Plane 180°		0.004350 m2	
Emitting area on Plane 0°		0.004350 m2		Emitting area on Plane 270°		0.001500 m2	
Emitting area on Plane 90°		0.001500 m2		Glare area at 76°		0.005975 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		04-03-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2450.00 lm	
LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	31 55 70 8 100			D DIN 5040	--		
F UTE	0.08 H + 0.92 T			B NBN	BZ 7 / 2 / BZ 8 / 4 / BZ 9		

Apertura troppo larga

Apertura troppo larga

Apertura troppo larga