

## Luminaire


Code 0613018A  
Name TALO MINI HAL wall white - USA

## Measurem.

Code FTS1700833  
Name TALO MINI HAL wall white - USA

Luminaire Flux	1468.59 lm	Luminaire Power	150.00 W	Efficacy	9.79 lm/W	Efficiency	66.75%
Lamps Flux	2200.00 lm	Maximum value	118.39 cd/klm	Position	C=0.00 G=15.00	CG	Double Symmetrical
Rectangular Luminaire		Length	210 mm	Width	100 mm	Height	34 mm
Rectangular Luminous Area		Length	141 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.005640 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°					
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type		Double Symmetrical			
Date	14-09-2002	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		2200.00 lm			
H64696							
C.I.E.	48 81 96 52 67	D DIN 5040		C31			
F UTE	0.35 E + 0.32 T	B NBN		BZ 4			

210mm x 100mm




Semipiani C

180.0 ——— 0.0  
270.0 - - - - 90.0

ULOR 31.94 %

DLOR 34.81 %

RN 47.85 %

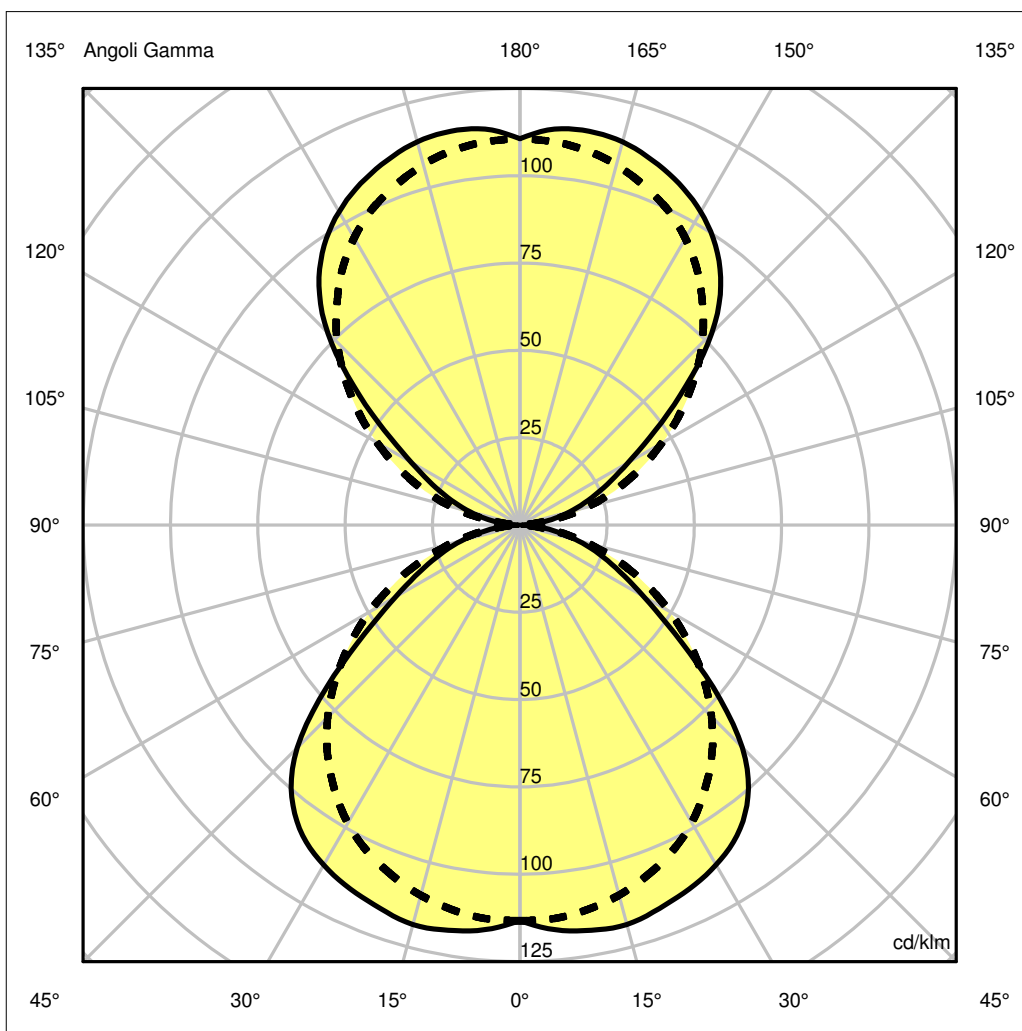

## Luminaire

Code 0613018A  
Name TALO MINI HAL wall white - USA

## Measurerm.


Code FTS1700833  
Name TALO MINI HAL wall white - USA

Luminaire Flux	1468.59 lm	Luminaire Power	150.00 W	Efficacy	9.79 lm/W	Efficiency	66.75%
Lamps Flux	2200.00 lm	Maximum value	118.39 cd/klm	Position	C=0.00 G=15.00	CG	Double Symmetrical
Rectangular Luminaire		Length	210 mm	Width	100 mm	Height	34 mm
Rectangular Luminous Area		Length	141 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.005640 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001364 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	14-09-2002			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2200.00 lm		
H64696							
C.I.E.	48 81 96 52 67			D DIN 5040	C31		
F UTE	0.35 E + 0.32 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.35	2.70	4.05	5.41	6.76	OC	1.43	2.86	4.30	5.73	7.16
OB	1.35	2.70	4.05	5.41	6.76	OD	1.43	2.86	4.30	5.73	7.16

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	249.24	255.84	260.47	252.82	238.59	198.33	119.19	69.77	37.95	10.76
OB	249.24	255.84	260.47	252.82	238.59	198.33	119.19	69.77	37.95	10.76
OC	249.24	248.89	241.48	227.06	203.44	170.89	130.58	87.18	44.13	8.23
OD	249.24	248.89	241.48	227.06	203.44	170.89	130.58	87.18	44.13	8.23

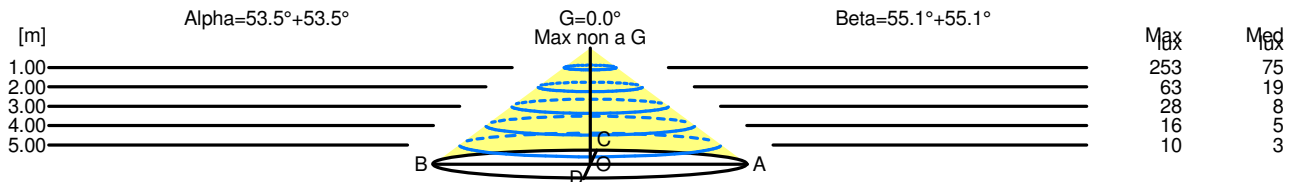

H[m]	D[m]	Max lux	Med lux	Alpha=53.5°+53.5°	G=0.0 Max non a G	
1.00	2.70	253	75			
2.00	5.41	63	19			
3.00	8.11	28	8			
4.00	10.81	16	5			
5.00	13.51	10	3			

H[m]	D[m]	Max lux	Med lux	Beta=55.1°+55.1°	G=0.0 Max non a G	
1.00	2.86	253	75			
2.00	5.73	63	19			
3.00	8.59	28	8			
4.00	11.45	16	5			
5.00	14.32	10	3			