

Luminaire

Code T086008+T086500
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL

Measur.

Code FTS1700235
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL


Luminaire Flux	780.67 lm	Luminaire Power	20.00 W	Efficacy	39.03 lm/W	Efficiency	100.00%
Lamps Flux	780.67 lm	Maximum value	1446.74 cd/klm	Position	C=90.00 G=110.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001216 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		780.67 lm	

LED Flux=1521,84lm LED Power=20W Eff=51% EfcLed=76lm/W EfcLum=39,03lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 1 9 28 13 100
 F UTE --

D DIN 5040
 B NBN

D13
 BZ 10

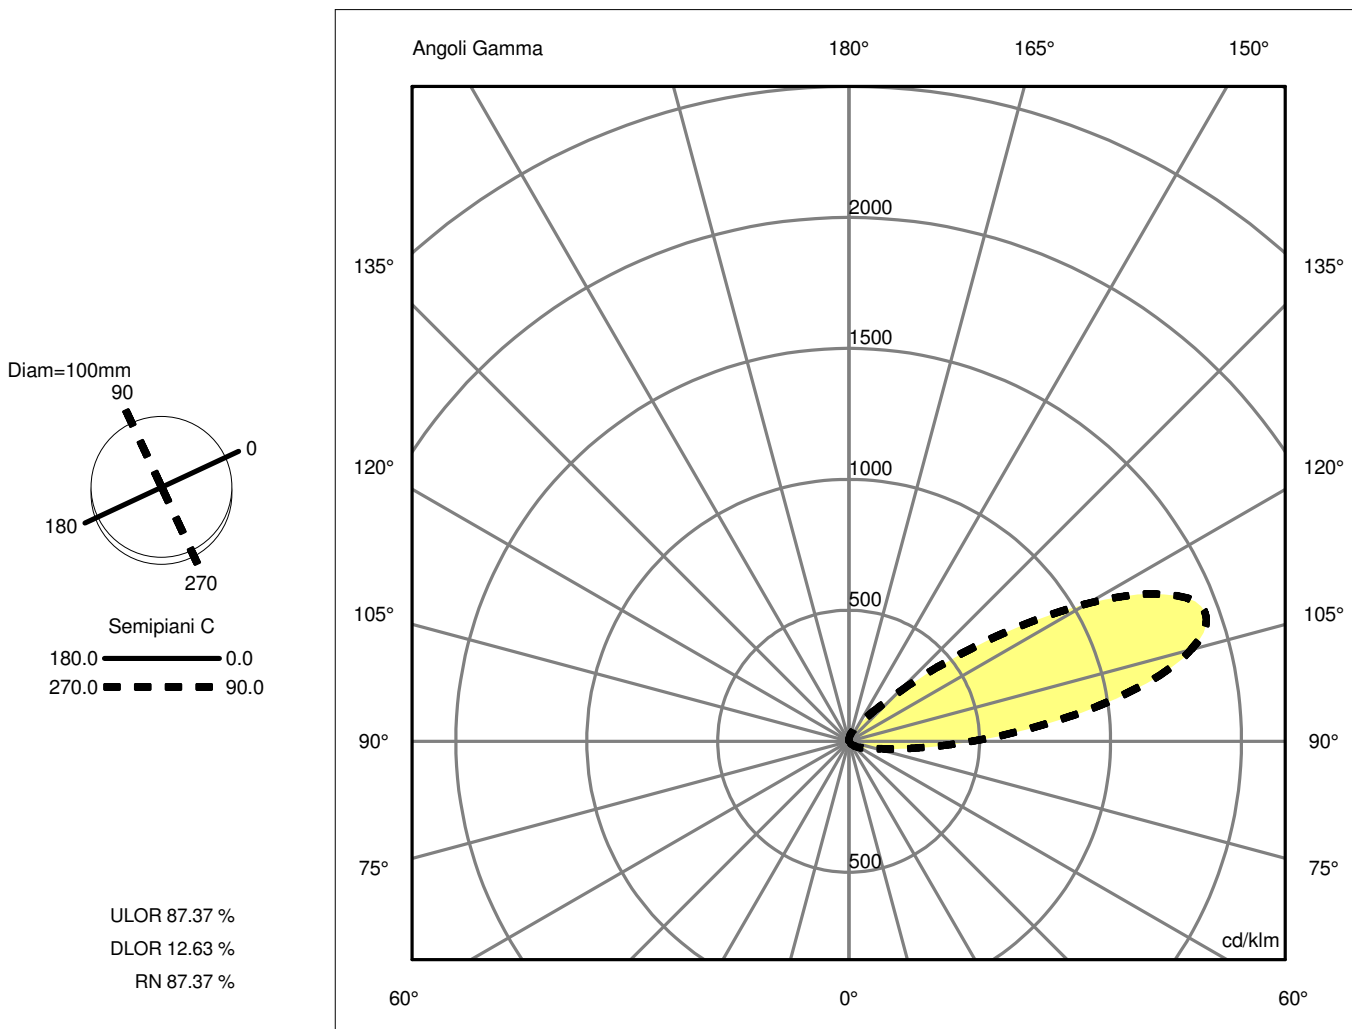

Luminaire

Code T086008+T086500
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL

Measur.

Code FTS1700235
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL

Luminaire Flux	780.67 lm	Luminaire Power	20.00 W	Efficacy	39.03 lm/W	Efficiency	100.00%
Lamps Flux	780.67 lm	Maximum value	1446.74 cd/klm	Position	C=90.00 G=110.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		780.67 lm	
LED Flux=1521,84lm LED Power=20W Eff=51% EfcLed=76lm/W EfcLum=39,03lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	1 9 28 13 100			D DIN 5040	D13		
F UTE	--			B NBN	BZ 10		

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Luminaire

Code T086008+T086500
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL

Measurement

Code FTS1700235
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO UL

Luminaire Flux	780.67 lm	Luminaire Power	20.00 W	Efficacy	39.03 lm/W	Efficiency	100.00%
Lamps Flux	780.67 lm	Maximum value	1446.74 cd/klm	Position	C=90.00 G=110.00	CG	Asymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=3H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=2H	6.4	7.0	7.6	8.2	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=3H	7.8	8.3	9.1	9.5	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=4H	8.2	8.6	9.4	9.8	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=6H	8.3	8.6	9.5	9.9	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=8H	8.2	8.6	9.5	9.8	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=12H	8.2	8.5	9.4	9.7	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=4H	16.9	17.3	18.2	18.5	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=6H	17.8	18.1	19.0	19.3	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=8H	17.9	18.2	19.2	19.4	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=12H	18.0	18.2	19.2	19.4	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=4H	20.3	20.6	21.6	21.9	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=6H	21.9	22.1	23.1	23.4	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=8H	22.4	22.6	23.6	23.8	< 0	< 0	< 0	< 0	< 0	< 0