


Luminaire

Code T086308
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL


Measurem.

Code FTS1700233
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL

Luminaire Flux	645.40 lm	Luminaire Power	15.00 W	Efficacy	43.03 lm/W	Efficiency	100.00%
Lamps Flux	645.40 lm	Maximum value	1476.36 cd/klm	Position	C=270.00 G=71.00	CG	Sym. on planes 270-90
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		645.40 lm	
LED Flux=1192,992lm LED Power=15W Eff=54% EfcLed=80lm/W EfcLum=43,03lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	4 23 68 87 100			D DIN 5040		B11	



ULOR 12.87 %
DLOR 87.13 %
RN 12.87 %

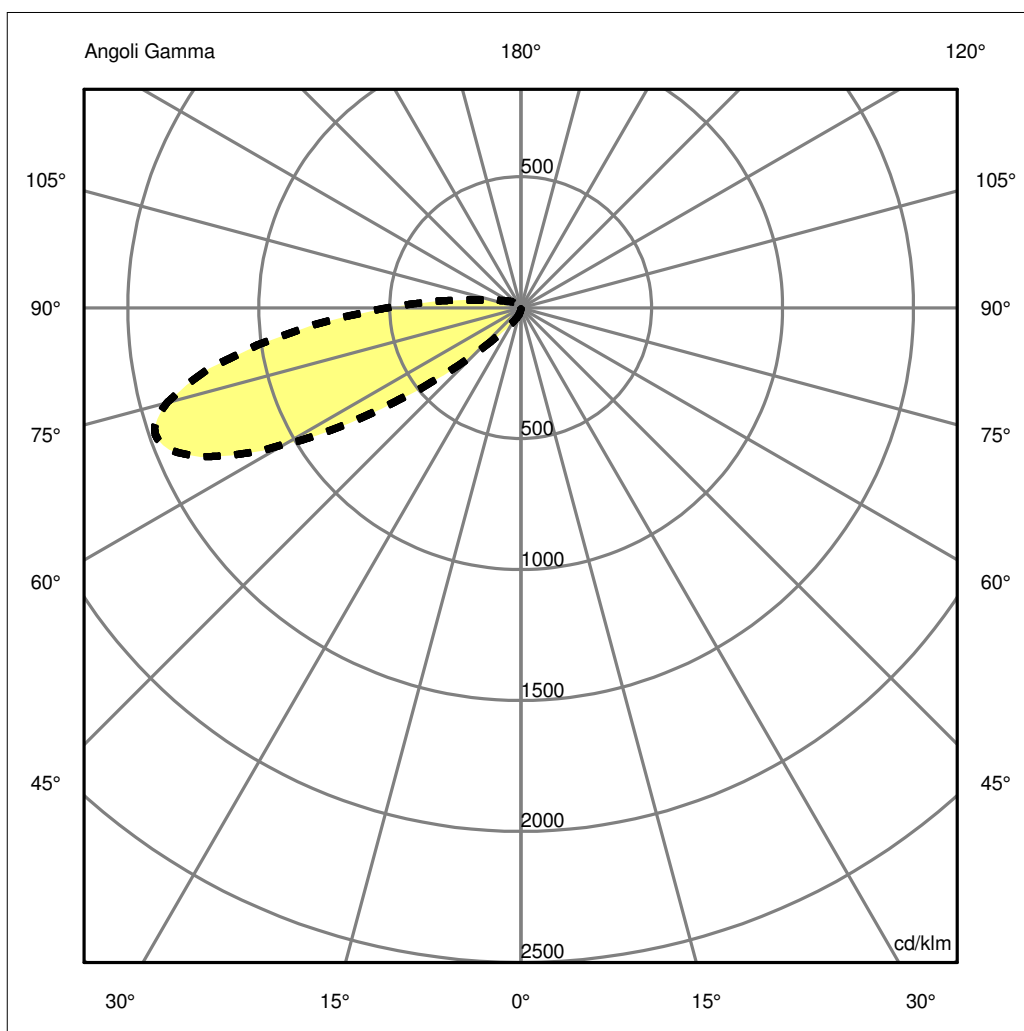

Luminaire

Code T086308
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL

Measurem.

Code FTS1700233
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL

Luminaire Flux	645.40 lm	Luminaire Power	15.00 W	Efficacy	43.03 lm/W	Efficiency	100.00%
Lamps Flux	645.40 lm	Maximum value	1476.36 cd/klm	Position	C=270.00 G=71.00	CG	Sym. on planes 270-90
Round Luminaire		Diam.	100 mm	Height	160 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		05-05-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		645.40 lm	
LED Flux=1192,992lm LED Power=15W Eff=54% EfcLed=80lm/W EfcLum=43,03lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	4 23 68 87 100			D DIN 5040	B11		

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0

Luminaire

Code T086308
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL

Measur.

Code FTS1700233
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE UL

Luminaire Flux	645.40 lm	Luminaire Power	15.00 W	Efficacy	43.03 lm/W	Efficiency	100.00%
Lamps Flux	645.40 lm	Maximum value	1476.36 cd/klm	Position	C=270.00 G=71.00	CG	Sym. on planes 270-90

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	13.4	15.2	13.9	15.7	38.3	35.5	37.3	36.0	37.8	38.3
x=2H y=3H	13.8	15.4	14.3	16.0	44.3	41.5	43.1	42.0	43.7	44.3
x=2H y=4H	13.8	15.3	14.3	15.9	46.7	43.9	45.5	44.5	46.0	46.7
x=2H y=6H	13.7	15.1	14.2	15.7	48.6	45.9	47.4	46.5	48.0	48.6
x=2H y=8H	13.6	15.1	14.2	15.6	49.5	46.8	48.2	47.4	48.8	49.5
x=2H y=12H	13.6	14.9	14.1	15.5	50.2	47.6	49.0	48.2	49.6	50.2
x=4H y=2H	25.1	26.6	25.6	27.2	38.3	35.6	37.1	36.1	37.7	38.3
x=4H y=3H	25.5	26.8	26.0	27.4	44.5	41.8	43.2	42.4	43.8	44.5
x=4H y=4H	25.5	26.8	26.1	27.4	47.1	44.5	45.8	45.1	46.4	47.1
x=4H y=6H	25.4	26.6	26.0	27.2	49.4	46.9	48.0	47.5	48.7	49.4
x=4H y=8H	25.4	26.5	26.0	27.1	50.4	47.9	49.0	48.6	49.7	50.4
x=4H y=12H	25.3	26.3	26.0	27.0	51.3	48.9	49.9	49.6	50.6	51.3
x=8H y=4H	32.0	33.1	32.6	33.7	47.0	44.5	45.6	45.2	46.3	47.0
x=8H y=6H	32.1	33.0	32.8	33.7	49.5	47.1	48.1	47.8	48.7	49.5
x=8H y=8H	32.1	32.9	32.8	33.6	50.7	48.4	49.3	49.1	49.9	50.7
x=8H y=12H	32.1	32.8	32.8	33.5	51.9	49.7	50.5	50.4	51.1	51.9
x=12H y=4H	33.8	34.8	34.5	35.5	46.9	44.5	45.5	45.2	46.2	46.9
x=12H y=6H	34.3	35.1	35.0	35.8	49.4	47.2	48.0	47.8	48.7	49.4
x=12H y=8H	34.4	35.1	35.1	35.8	50.7	48.5	49.2	49.2	49.9	50.7