

EVERYTHING 105 ROUND TRIMLESS

Ernesto Gismondi

SUBMITTAL FORM

#CAT	SERIE	TYPE	SHAPE	MOUNTIG	CCT	BEAM	COLOR
USC-AEVH	10	—	R	TL	—	—	C

QUANTITY

Serie	10 = Everything 105
Type	A = Adjustable D = Downlight
Mounting	TL = Trimless
CCT	27 = 2700K / 90CRI 30 = 3000K / 90CRI 35 = 3500K / 90CRI
Beam angle	SP = 25 deg NF = 28 deg
Cone color	C = Chrome reflector

MODEL 105 IS ONLY AVAILABLE WITH SPOT AND NARROW FLOOD OPTICS

TECHNICAL DATA:

Everything 105 Round / Square	90CRI					
	2700K		3000K		3500K	
Beam angle:	25°	28°	25°	28°	25°	28°
Power consumption:	15W					
Lumen Nominal:	1330lm		1390lm		1415lm	
Lumen Delivered:	1020	797	1066	833	1085	848
Efficacy lm/W:	68	53	71	55	36	28
Efficiency (%):	77%	60%	77%	60%	77%	60%


FEATURES:

Construction :

Light module: Thermoplastic housing. Provide with quick connector for easy connection with power pack or new construction frame.

Frame: NON-IC remodeler power pack. New construction mounting frame. (see page 2)


Weight: 0.56lbs (0.25Kg)

Label:  - suitable for dry locations

Class: IP20 


PHOTOMETRIC DATA:

3000K SHOWN DATA

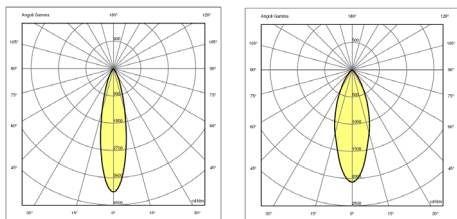

Max Candela: 4067 cd/klm
Everything 105 30K 25° CH
V = 0° H = 0°

Max Candela: 2064 cd/klm
Everything 105 30K 28° CH
V = 0° H = 0°

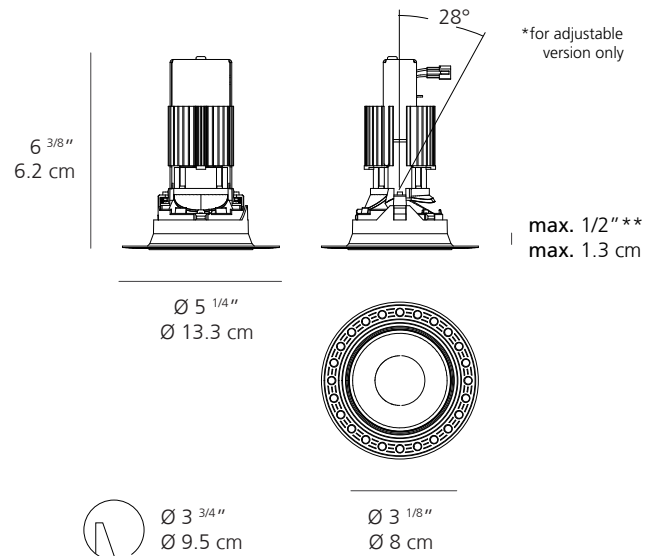

Project Name	
Floorplan Ref. Type	
Quantity	
Notes	
Date	
Signature & Stamp	

EVERYTHING 105 ROUND INSTALLATION

Ernesto Gismondi



REMODELER POWER PACK:

#CAT	SERIE	MOUNTING	DRIVER	QUANTITY
USC-AEVF	8010	R	—	

Serie	8010 = Everything 80 /105
mounting	R = Remodeler
Driver	06 = Phase dimming (120V only) (277V ON/OFF only) 08 = 0-10V dimming (120/ 277V)

Construction :

Minimum ceiling height 8"
Galvanized steel frame.

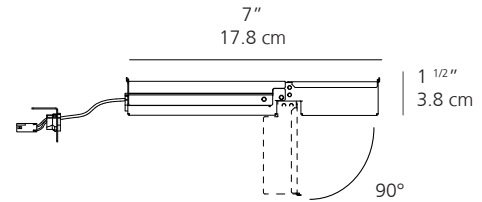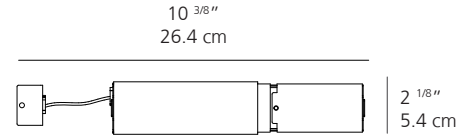


NEW CONSTRUCTION FRAME:

#CAT	SERIE	SHAPE	MOUNTING	DRIVER	QUANTITY
USC-AEVF	10	R	N	—	


Serie	10 = Everything 105
Shape	R = Round
mounting	N = New construction frame (NON-IC)
Driver	11 = 0-10V (120V only) 12 = 0-10V (277V only)

Construction :


Galvanized steel frame.
Alignment details available on each side of the frame for precision.
For wood joist and grid ceilings.
Mounting bar extends from 14 3/8" to 26" (360- 660mm).
Easy driver replacement from ceiling aperture.



15"
38.1 cm



4 1/2"
11.4 cm



Ø 3 3/4"
Ø 9.5 cm

14 1/2"
37 cm
to
26"
66 cm