

Project:	Type:
Notes:	

PAD SYSTEM STANDALONE


Design Carlotta de Bevilacqua

#CAT	family	housing	cord length	CRI	CCT	driver	body color
USC-M	PAK	___	6	8	___	08	W

Quantity

family	PAK = Pad Standalone
housing	R = Recessed S = Surface
cord length*	6 = 6 feet
CRI	8 = 85CRI TYP
CCT	30 = 3000K 35 = 3500K
driver*	08 = On/Off + 0-10V Dimming UNV
body color	W = White

*for special requests, please contact factory.

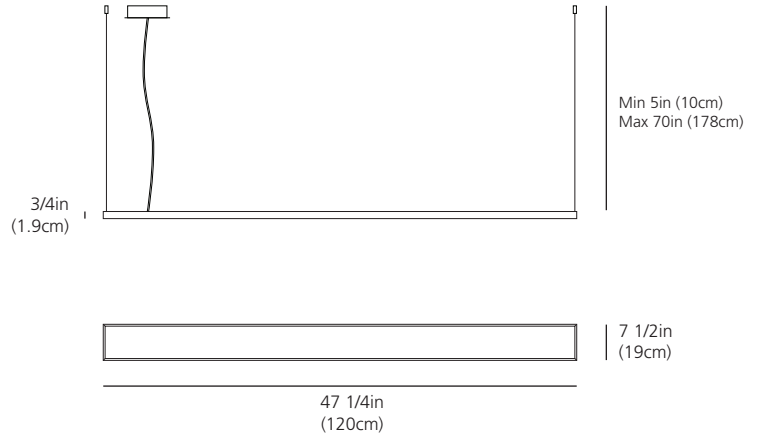

SPECIFICATIONS:

Power input : 54W
 Luminous flux: 3602lm (estimated)
 Efficacy: 66.7lm/W (estimated)

FEATURES:

Thin module with direct and indirect emission, with uniform luminous surface thanks to a patented design derived from TV screen backlighting systems. Features a glare ratio (UGR) below 19, perfect for office applications. Installation with suspension cables.

Construction : structure in extruded aluminum, available in white powder coat, top screen with anti-dust polycarbonate. Suspension cables in steel with quick adjustment.

Notes: for all other finishes, please contact your local Artemide sales representative.

Label: - suitable for dry locations

Class: IP20

PHOTOMETRIC DATA:

Photometric curve :

