



**Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation: To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. This equipment is guaranteed only when used as indicated in these instructions; Therefore they should be kept for future reference. To prevent electrical shock, turn off power supply before carrying out any connection or maintenance operations.**



**Attention: Tagora 970 luminaires should be installed and held by 2 persons at least. It is highly recommended not to hold Tagora 970 by one side, this would deform the shape of the body.**

**STEP 1**



**Remove the baffle**

1. Loosen wing nuts
2. Turn the baffle to remove it from the body


**STEP 2**

**Install the body**

1. Drill the four appropriate holes, according to mounting layout.
2. Fix the body to ceiling with appropriate screws

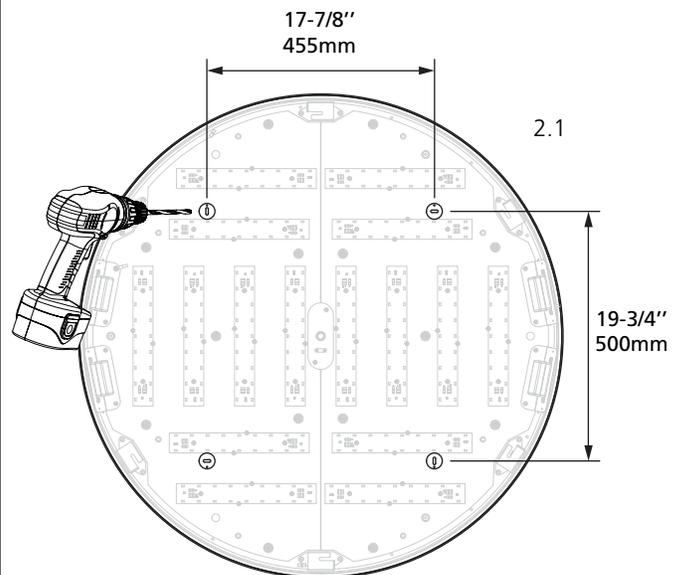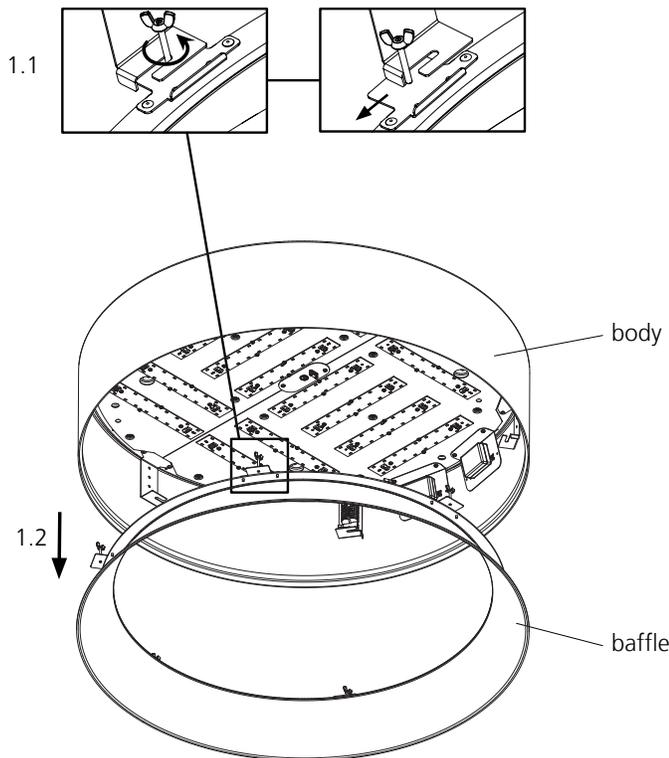

MOUNTING LAYOUT


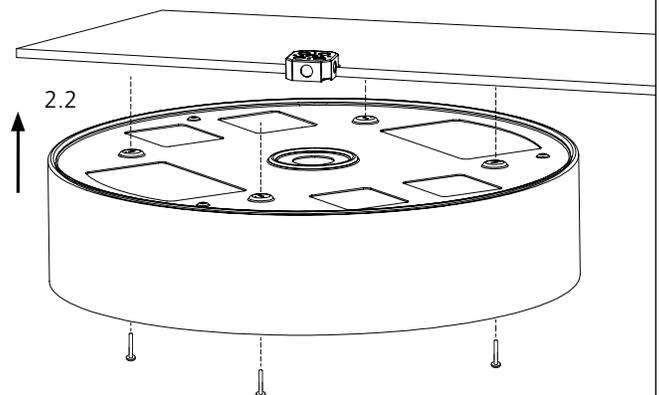




**STEP 3**

**Make connections**

1. Remove center cover plate to access junction box wires
2. Make the appropriate electrical connections (refer to wiring diagram)
3. Replace the cover plate and tighten strain relief to hold electrical wire

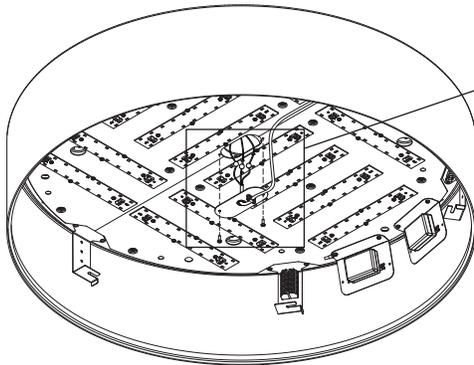

FIXTURE WIRES		CEILING WIRES	FOR 0-10V DIM VERSION	
GREEN	G	GREEN	PURPLE	0-10V +
BLACK	L	BLACK	GREY	0-10V -
WHITE	N	WHITE		

FOR 3-WIRES VERSION		FOR DIGITAL VERSION	
ORANGE	DIM HOT	PURPLE	DIGITAL
		PURPLE	DIGITAL

Note: only one dimming method can be used at the same time.

**STEP 4**

**Replace the baffle**

1. Install the diffuser on the baffle
2. Reinstall the baffle in the body
3. Push the diffuser up to reach wing nuts
4. Tighten wing nuts to fix the baffle

