



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation: To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. This equipment is guaranteed only when used as indicated in these instructions; Therefore they should be kept for future reference. To prevent electrical shock, turn off power supply before carrying out any connection or maintenance operations.





Attention: Tagora 970 luminaires should be installed and held by 2 persons at least. It is highly recommended not to hold Tagora 970 by one side, this would deform the shape of the body.

STEP 1

Install canopy to the ceiling
The luminaire should not be held by electrical Junction box

- 1.1 Pass wires through center of mounting canopy.
- 1.2 Install mounting canopy on building structure using appropriate anchoring.
- 1.3 Pass aircraft cable inside bracket tabs (3X).



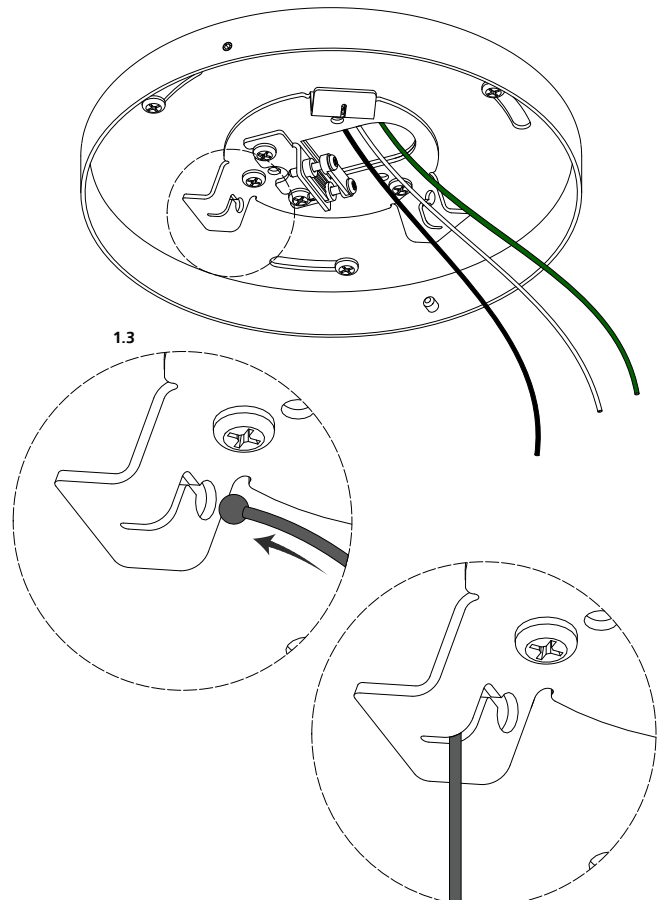
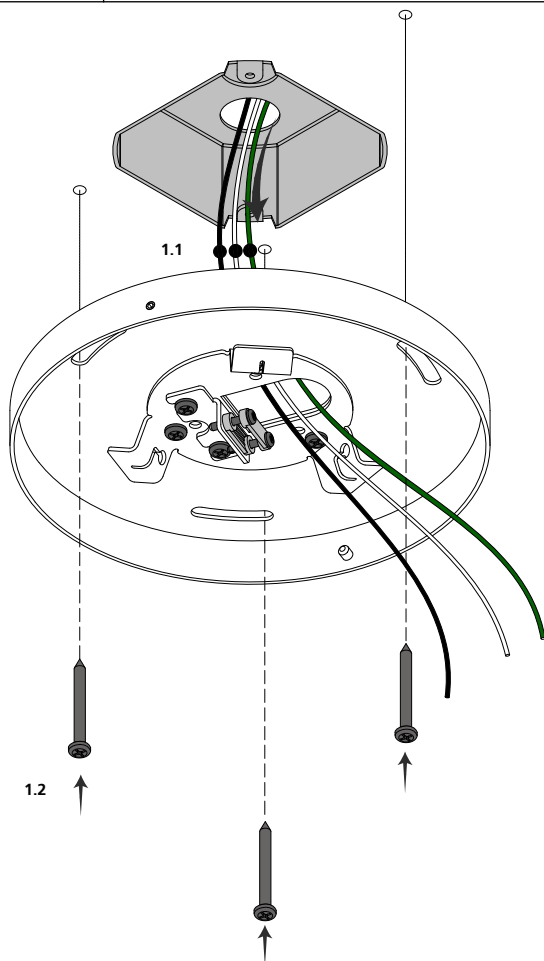


STEP 2

Steel cables adjustment

- 2.1 Pass aircraft cable inside body swivel gripper (3X).
- 2.2 Pull aircraft cable.
- 2.3 Cut exceeding aircraft cable after final height and level adjustment.

Note : Swivel gripper must always be aligned with center.

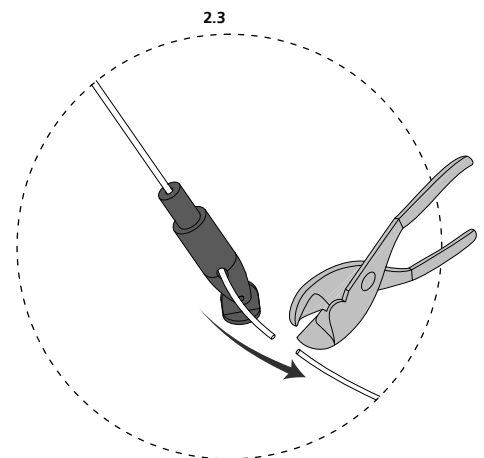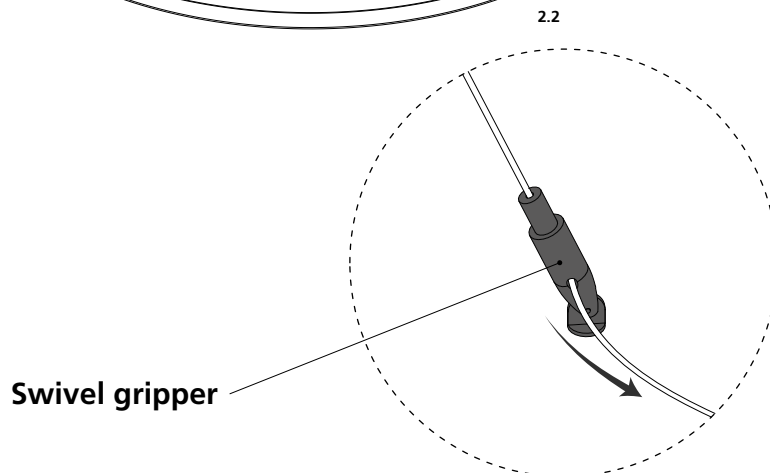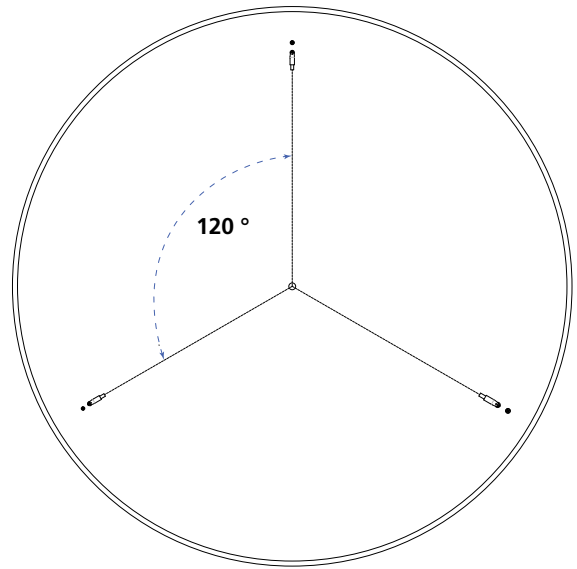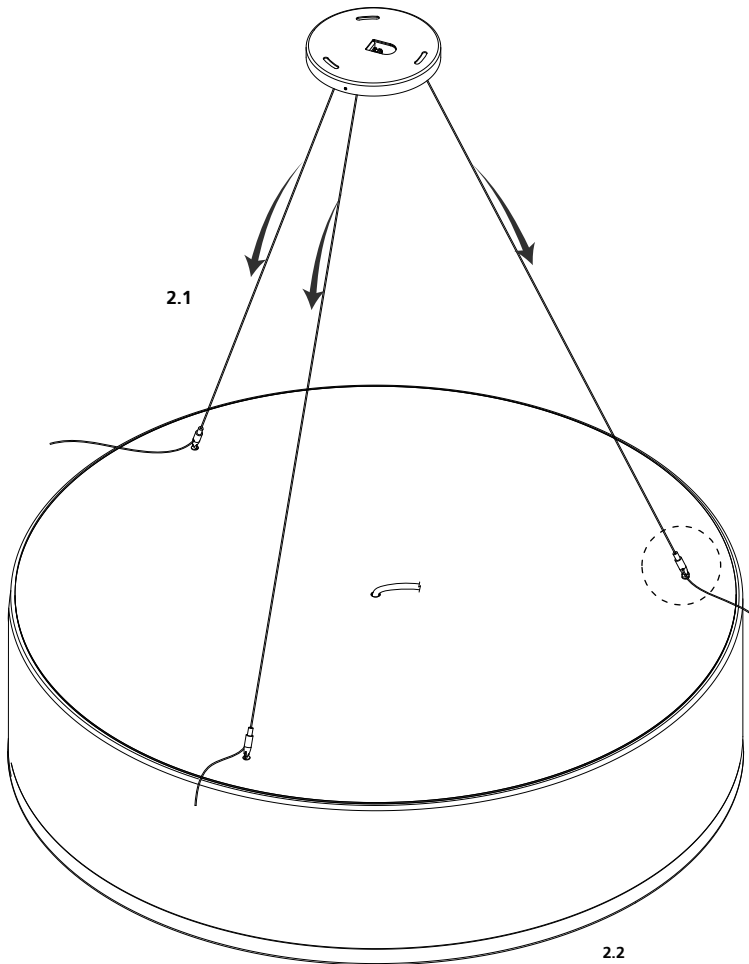




STEP 3

Install the canopy


3.1 Release screws and remove strain relief bracket from mounting canopy.
3.2 Pass cordset through the center of canopy and strain relief.
3.3 Make appropriate connection. Follow wiring diagram.

3.4 Push connections inside junction box.
3.5 Install strain relief bracket on mounting canopy and tighten screws.


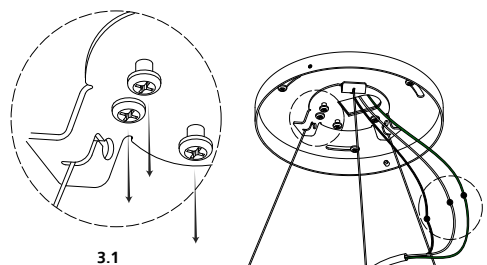


3.1


Strain relief
bracket

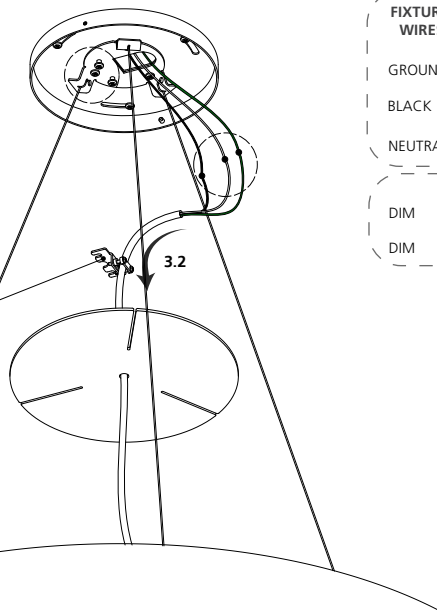

3.2

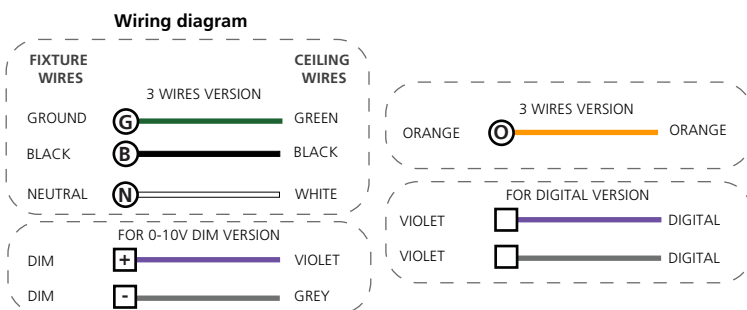


3.3

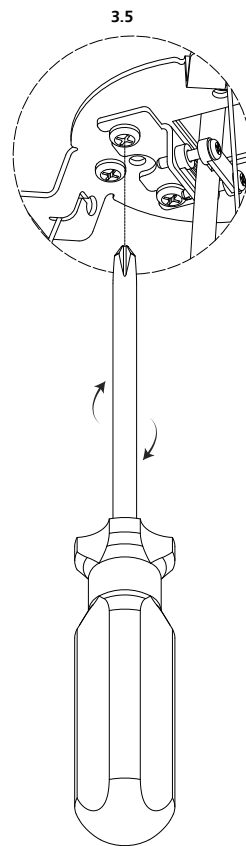

3.5



- 3.6 Push canopy up to the mounting pan.
3.7 Use allen key to hold canopy with set screws.

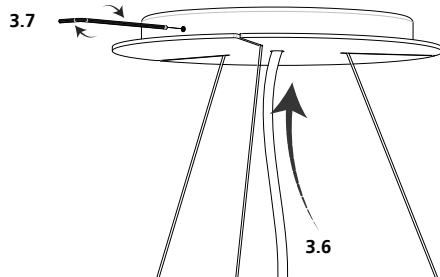

STEP 4

Install the baffle and diffuser

- 4.1 Loosen wing nuts.
4.2 Turn and remove the baffle.
4.3 Install the diffuser on the baffle.

- 4.4 Reinstall the baffle in the body.
4.5 Push the diffuser up to reach wing nuts.
4.6 Tighten wing nuts to fix the baffle.

