

## Luminaire

Code 1095018A  
Name UNTERLINDEN F 3000K ALU

## Measurerm.

Code FTS2300250  
Name UNTERLINDEN F 3000K ALU


Luminaire Flux	416.00 lm	Luminaire Power	8.00 W	Efficacy	52.00 lm/W	Efficiency	100.00%
Sources Flux	416.00 lm	Maximum value	587.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	118 mm	Height	100 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area			0.001590 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.000385 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		06-11-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			416.00 lm

LED Flux=792lm LED Power=5.8W Eff=53% EfcLed=137lm/W EfcLum=52lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(19k)=105000h

C.I.E. 74 94 99 100 100  
F UTE 1.00 B

D DIN 5040 A60  
B NBN BZ 2

Diam=118mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

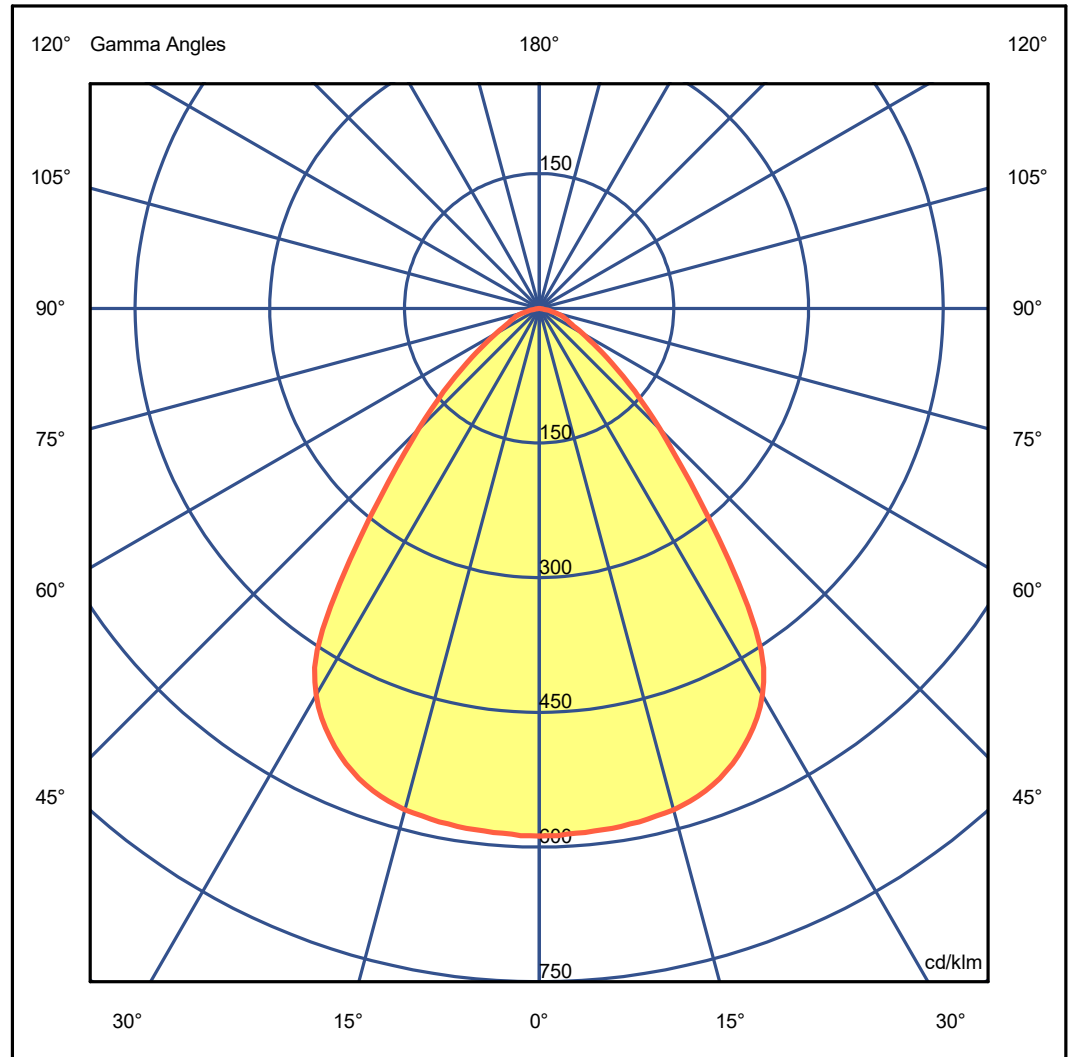

## Luminaire

Code 1095018A  
Name UNTERLINDEN F 3000K ALU

## Measurem.


Code FTS2300250  
Name UNTERLINDEN F 3000K ALU


Luminaire Flux	416.00 lm	Luminaire Power	8.00 W	Efficacy	52.00 lm/W	Efficiency	100.00%
Sources Flux	416.00 lm	Maximum value	587.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.82	1.64	2.45	3.27	4.09	OC	0.82	1.64	2.45	3.27	4.09
OB	0.82	1.64	2.45	3.27	4.09	OD	0.82	1.64	2.45	3.27	4.09

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	244.46	243.74	240.41	224.05	168.67	79.00	35.52	15.74	7.04	0.34
OB	244.46	243.74	240.41	224.05	168.67	79.00	35.52	15.74	7.04	0.34
OC	244.46	243.74	240.41	224.05	168.67	79.00	35.52	15.74	7.04	0.34
OD	244.46	243.74	240.41	224.05	168.67	79.00	35.52	15.74	7.04	0.34

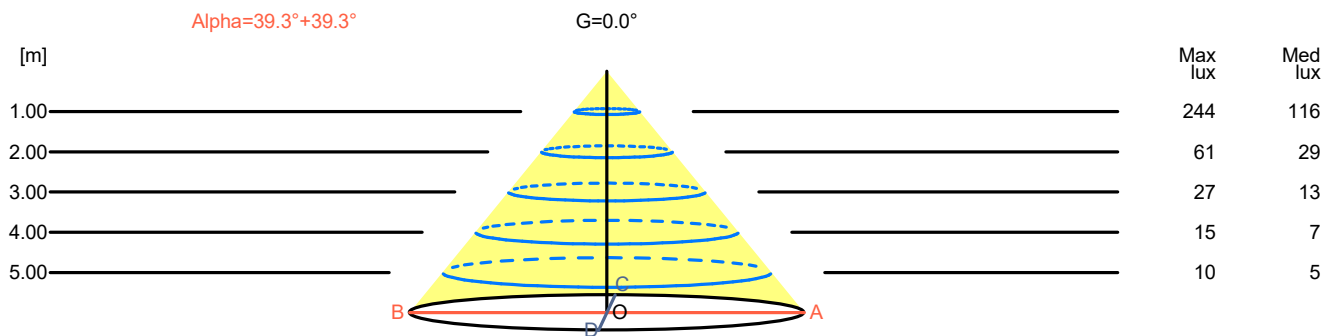

H[m]	D[m]	Max lux	Med lux	Alpha=39.3°+39.3°	G=0.0	
1.00	1.64	244	116			
2.00	3.27	61	29			
3.00	4.91	27	13			
4.00	6.54	15	7			
5.00	8.18	10	5			